


日期/Date	档案员 Filing Clerk	线径/Wire Gauge		d	剥线长度 Stripping Length	重量/Weight g
		mm <sup>2</sup>	AWG			
CSSM-0.25	1010141100101	0.09-0.25	28-24	0.64	5	0.19
CSSM-0.33	1010141100201	0.25-0.33	26-22	0.9	5	0.18
CSSM-0.52	1010141100501	0.33-0.52	22-20	1.12	5	0.17

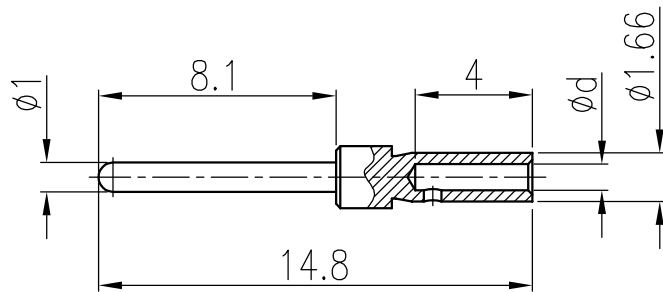


技术参数:

- 材料: 铜合金
- 表面处理: 镀银
- 额定电流: 5A
- 接触电阻:  $\leq 3m\Omega$
- 线径范围: 0.09-0.52mm<sup>2</sup>(28-20 AWG)
- 可插拔次数:  $\geq 500$

Technical specification:

- Material: copper alloy
- Surface: silver plated
- Rated current: 5A
- Contact resistance:  $\leq 3m\Omega$
- Wire gauge: 0.09-0.52mm<sup>2</sup>(28-20 AWG)
- Mating cycles:  $\geq 500$



						表面处理 Finish	-			图号 Drawing No.	-
						材料 Material	-			产品代号 Part Code	CSSM-XX
标记 Mark	处数 Number	变更描述/Description			签名 Signature	日期 Date				产品料号 Part No.	-
姓名/Name	日期/Date	姓名/Name	日期/Date	比例 Scale	版本 REV.	重量 Weight	数量 Qty.	产品名称 Part Name			-
绘图 Drawn	BQ LUO	18.10.2010	标准化 Stand.	-	-						
审核 Checked	P RAO	18.10.2010				4:1	V1.0	-	-		
工艺 Process	-	-	批准 Approved	YY LIN	18.10.2010			All Dimensions in mm Original Size DIN A 4			<b>厦门唯恩电气有限公司</b> XIAMEN WAIN ELECTRICAL CO.LTD