

面板安装开孔图
 Panel cut out

技术参数:


- 插针数: 9/12/25
- 额定电流: 40A/10A/5A
- 额定电压: 630V/250V/50V
- 额定脉冲电压: 8kV/4kV/0.8kV
- 污染等级: 3
- 依据UL/CSA的额定电压: 600V
- 绝缘阻抗: $>10^{10}\Omega$
- 材料: 聚碳酸酯
- 颜色: RAL 7032 (浅灰色)
- 温度范围: $-40^{\circ}\text{C} - +125^{\circ}\text{C}$
- 依据UL 94的阻燃等级: V0
- 可插拔次数: >500

插针:

- 接线方式: 冷压连接
- 材料: 铜合金
- 表面处理:
 - 镀银
 - 镀金
- 接触电阻: $<3\text{m}\Omega$
- 线径范围: 0.09-0.52mm²(28-20AWG)/
0.14-2.5mm²(26-14AWG)/
1.5-6mm²(16-10AWG)
- 剥线长度: 5/8/9(9.6)mm
- 工具:
 - 冷压钳: TL03(0.09-0.82mm²)
TL02G(0.14-4mm²)
TL02-0G(1.5-6mm²)
 - 退针器: TL08/TL00/TL06G

Technical specification:

- Inserts:
- No. of contact: 9/12/25
 - Rated current: 40A/10A/5A
 - Rated voltage: 630V/250V/50V
 - Rated impulse voltage: 8kV/4kV/0.8kV
 - Pollution degree: 3
 - Rated voltage acc.to UL/CSA: 600V
 - Insulation resistance: $>10^{10}\Omega$
 - Material: polycarbonate
 - Colour: RAL 7032(light grey)
 - Temperature range: $-40^{\circ}\text{C} - +125^{\circ}\text{C}$
 - Flammability acc.to UL 94: V0
 - Mating cycles: >500
- Contacts:
- Terminal: crimp terminal
 - Material: copper alloy
 - Surface:
 - Hard-silver plated
 - Hard-gold plated
 - Contact resistance: $<3\text{m}\Omega$
 - Wire gauge: 0.09-0.52mm²(28-20AWG)/
0.14-2.5mm²(26-14AWG)/
1.5-6mm²(16-10AWG)
 - Stripping length: 5/8/9(9.6)mm
 - Tools:
 - Crimp contact tool: TL03(0.09-0.82mm²)
TL02G(0.14-4mm²)
TL02-0G(1.5-6mm²)
 - Contact removal tool: TL08/TL00/TL06G

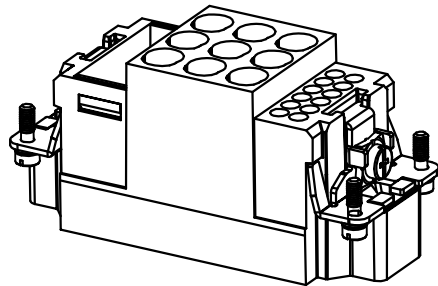

						表面处理 Finish	-				图号 Drawing No.	-
						材料 Material	-				产品代号 Part Code	HK-009/12/25-MC
标记 Mark	处数 Number	变更描述/Description			签名 Signature	日期 Date					产品料号 Part No.	1280090100002
		姓名/Name	日期/Date		姓名/Name	日期/Date	比例 Scale	版本 REV.	重量 Weight	数量 Qty.	产品名称 Part Name	-
绘图 Drawn		LJ ZOU	16.11.2018	标准化 Stand.	-	-	1:1	V1.0	73.4g	-		
审核 Checked		HZ LAN	16.11.2018									
工艺 Process		-	-	批准 Approved	HQ ZHANG	16.11.2018			厦门唯思电气有限公司 XIAMEN WAIN ELECTRICAL CO.LTD			