
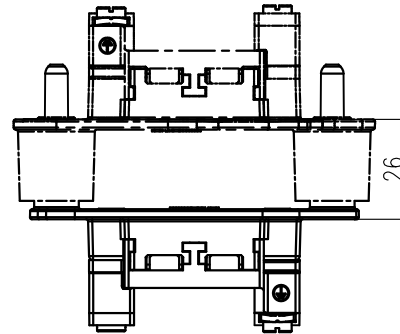


开孔尺寸图
(Panel cut out)

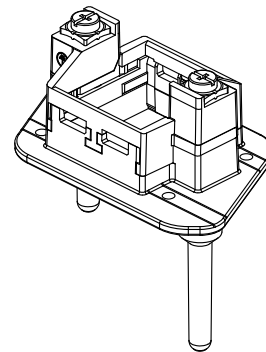

插合距离26mm

技术参数:

- 模块数量: 2+PE
- 材料: 压铸锌
- 温度范围: $-40^{\circ}\text{C} - +125^{\circ}\text{C}$
- 浮动公差: $\pm 2\text{mm}$
- 可插拔次数: ≥ 500
- 备注: 如果全部装配气动模块时, 对插时需注意正确的模块位置

Technical specification:

- No. of module: 2+PE
- Material: zinc die-cast
- Temperature range: $-40^{\circ}\text{C} - +125^{\circ}\text{C}$
- Floating Tolerance: $\pm 2\text{mm}$
- Mating cycles: ≥ 500
- Note: If the modules be assembled are all pneumatic modules, pay attention to the correct module position when mating.

						表面处理 Finish				-		图号 Drawing No.		-	
						材料 Material				-		产品代号 Part Code		HF6B-MADK	
标记 Mark		处数 Number		变更描述/Description				签名 Signature		日期 Date		产品料号 Part No.		1310060001006	
		姓名/Name		日期/Date				姓名/Name		日期/Date		比例 Scale		版本 REV.	
绘图 Drawn		SY JI		20.02.2020		标准化 Stand.		-		-		重量 Weight		数量 Qty.	
审核 Checked		HZ LAN		20.02.2020								2:3		V1.0	
工艺 Process		-		-		批准 Approved		HQ ZHANG		20.02.2020		All Dimensions in mm Original Size DIN A 4			
												厦门唯恩电气有限公司 XIAMEN WAIN ELECTRICAL CO.,LTD			