


开孔尺寸图  
 (Paenl cut out)

技术参数:

- 模块数量: 4+PE
- 材料: 压铸锌
- 温度范围:  $-40^{\circ}\text{C} - +125^{\circ}\text{C}$
- 浮动公差:  $\pm 2\text{mm}$
- 可插拔次数:  $>500$
- 备注: 如果全部装配气动模块时, 对插时需注意正确的模块位置

Technical specification:

- No. of module: 4+PE
- Material: zinc die-cast
- Temperature range:  $-40^{\circ}\text{C} - +125^{\circ}\text{C}$
- Floating Tolerance:  $\pm 2\text{mm}$
- Mating cycles:  $>500$
- Note: If the modules be assembled are all pneumatic modules, pay attention to the correct module position when mating.

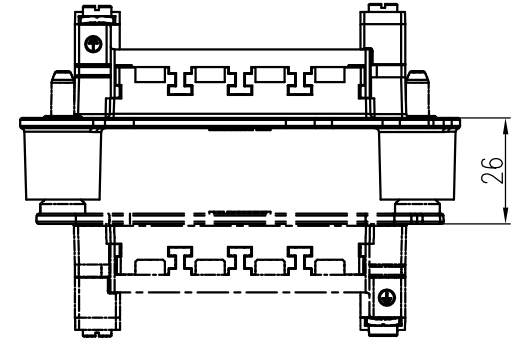

插合距离26mm

						表面处理 Finish				-		图号 Drawing No.		-			
						材料 Material				-		产品代号 Part Code		HF16B-FADK			
标记 Mark		处数 Number		变更描述/Description		签名 Signature		日期 Date		比例 Scale		版本 REV.		重量 Weight		数量 Qty.	
										2:3		V1.0		-g		-	
绘图 Drawn		SY JI		11.26.2018		标准化 Stand.		-		-		产品料号 Part No.		1310160001004			
审核 Checked		HZ LAN		11.26.2018								产品名称 Part Name		HF16B-FADK,金属对 接框架,成品			
工艺 Process		-		-		批准 Approved		HQ ZHANG		11.26.2018		All Dimensions in mm Original Size DIN A 4		厦门唯思电气有限公司 XIAMEN WAIN ELECTRICAL CO.LTD			