
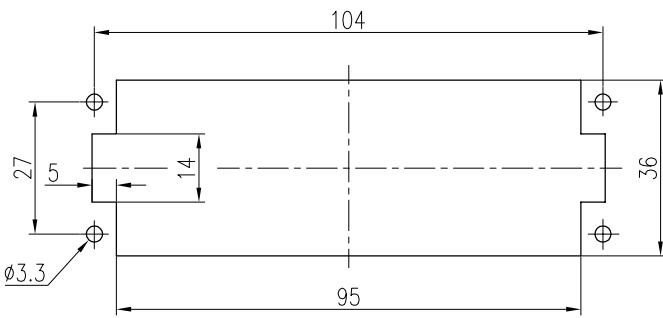
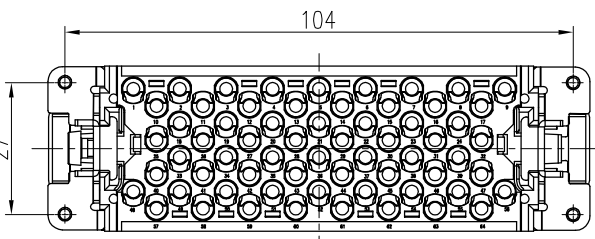
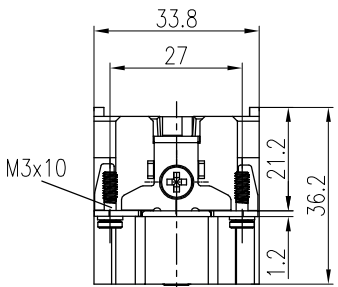


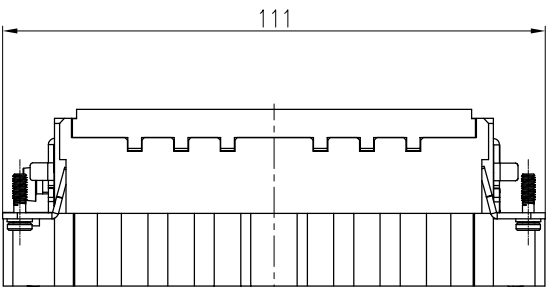

面板安装开孔图

Panel cut out

技术参数:

插芯:

- 插针数: 64+PE
- 额定电流: 16A
- 额定电压: 500V
- 额定脉冲电压: 6kV
- 污染等级: 3
- 依据UL/CSA的额定电压: 600V
- 绝缘阻抗:  $>10^{10}\Omega$
- 材料: 聚碳酸酯
- 颜色: RAL 7032 (浅灰色)
- 温度范围:  $-40^{\circ}\text{C} - +125^{\circ}\text{C}$
- 依据UL 94的阻燃等级: V0
- 可插拔次数:  $>500$

插针:

- 接线方式: 冷压连接
- 材料: 铜合金
- 表面处理:
  - 镀银
  - 镀金
- 接触电阻:  $<1\text{m}\Omega$
- 线径范围:  $0.14-4.0\text{mm}^2(26-12\text{ AWG})$
- 剥线长度: 7.5mm
- 工具:
  - 冷压钳: TL02G( $0.5-4\text{mm}^2$ ) TL02( $0.14-0.37\text{mm}^2$ )
  - 退针器: TL01


Technical specification:

Insters:

- No. of contact: 64+PE
- Rated current: 16A
- Rated voltage: 500V
- Rated impulse voltage: 6kV
- Pollution degree: 3
- Rated voltage acc.to UL/CSA: 600V
- Insulation resistance:  $>10^{10}\Omega$
- Material: polycarbonate
- Colour: RAL 7032(light grey)
- Temperature range:  $-40^{\circ}\text{C} - +125^{\circ}\text{C}$
- Flammability acc.to UL 94: V0
- Mating cycles:  $>500$

Contacts:

- Terminal: crimp terminal
- Material: copper alloy
- Surface:
  - Hard-silver plated
  - Hard-gold plated
- Contact resistance:  $<1\text{m}\Omega$
- Wire gauge:  $0.14-4.0\text{mm}^2(26-12\text{ AWG})$
- Stripping length: 7.5mm
- Tools:
  - Crimp contact tool: TL02G( $0.5-4\text{mm}^2$ ) TL02( $0.14-0.37\text{mm}^2$ )
  - Contact removal tool: TL01

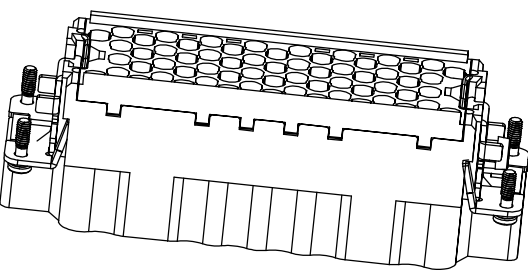

|               |              |                  |                |          |                 |                |                                               |            |                                              |                   |                   |
|---------------|--------------|------------------|----------------|----------|-----------------|----------------|-----------------------------------------------|------------|----------------------------------------------|-------------------|-------------------|
|               |              |                  |                |          |                 | 表面处理<br>Finish | —                                             |            |                                              | 图号<br>Drawing No. | —                 |
|               |              |                  |                |          |                 | 材料<br>Material | —                                             |            |                                              | 产品代号<br>Part Code | HEE-064-MC        |
| 标记<br>Mark    | 处数<br>Number | 变更描述/Description |                |          | 签名<br>Signature | 日期<br>Date     | 比例<br>Scale                                   | 版本<br>REV. | 重量<br>Weight                                 | 数量<br>Qty.        | 产品料号<br>Part No.  |
| 绘图<br>Drawn   | L CHEN       | 13.10.2020       | 标准化<br>Stand.  | —        | —               | —              | 2:3                                           | V1.1       | 66.6g                                        | —                 | 1230640100001     |
| 审核<br>Checked | HZ LAN       | 13.10.2020       |                |          |                 |                |                                               |            |                                              |                   | 产品名称<br>Part Name |
| 工艺<br>Process | —            | —                | 批准<br>Approved | HQ ZHANG | 13.10.2020      |                |                                               |            |                                              |                   | —                 |
|               |              |                  |                |          |                 |                | All Dimensions in mm<br>Original Size DIN A 4 |            | 厦门唯恩电气有限公司<br>XIAMEN WAIN ELECTRICAL CO.,LTD |                   |                   |