
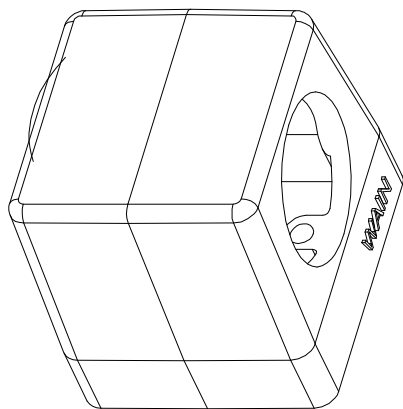
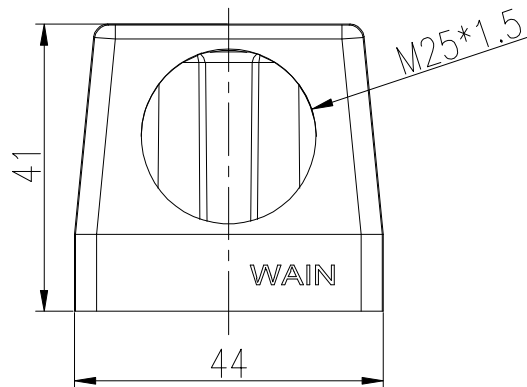


日期/Date	
填写人/Filling Clerk	

未注公差标准					
		基本线性尺寸分段			
公差等级	0.1~3	3~6	6~30	30~120	120~400
中等m	±0.1	±0.1	±0.2	±0.3	±0.5
		基本角度尺寸分段			
公差等级	0.5~3	3~6	6~30	>30	
中等m	±0.2	±0.5	±1	±2	
		基本高度尺寸分段			
公差等级	1~30	30~120	120~400	>400	
中等m	±1°	±2°	±3°	±5°	

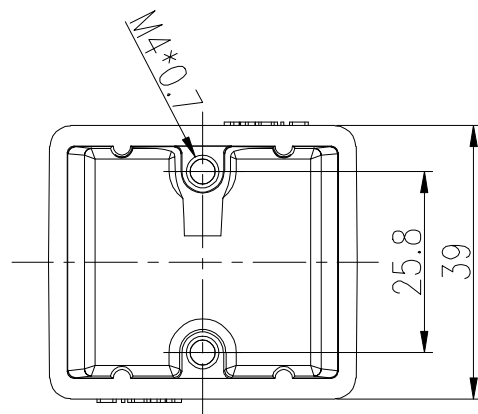

技术参数:

- 材料: 压铸铝
- 表面处理: 粉末喷涂
- 颜色: RAL 7037 (灰色)
- 温度范围: -40℃ - +125℃
- 防护等级: IP65
- 出线方向: 侧出线
- 出线孔数: 1
- 螺纹规格: M25

Technical specification:

- Material: aluminium die-cast
- Surface: powder-coated
- Colour: RAL 7037(grey)
- Temperature range: -40℃ - +125℃
- Degree of protection: IP65
- Cable entry: Side entry
- No. of cable entries: 1
- Thread size: M25

表面处理 Finish		—		图号 Drawing No.	
材料 Material		—		产品代号 Part Code	
比例 Scale		版本 REV.		产品料号 Part No.	
1:1		V1.1		1290025001001	
重量 Weight		数量 Qty.		产品名称 Part Name	
60g		—		—	
All Dimensions in mm Original Size DIN A 4		WAIN 厦门唯恩电气有限公司 XIAMEN WAIN ELECTRICAL CO.,LTD			
标记 Mark	处数 Number	变更描述/Description		姓名/Name	日期/Date
绘图 Drawn	L CHEN	03.09.2020		—	—
审核 Checked	HZ LAN	03.09.2020		—	—
工艺 Process	—	—		批准 Approved	HQ ZHANG 03.09.2020