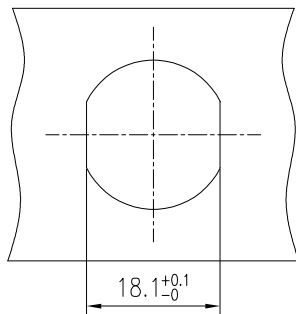
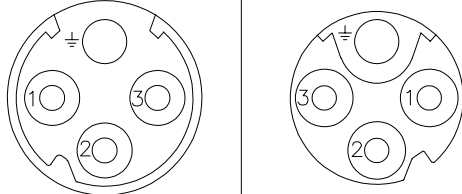
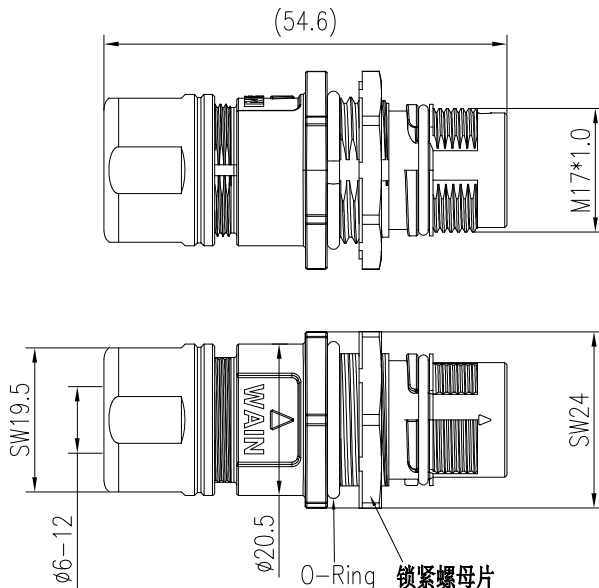
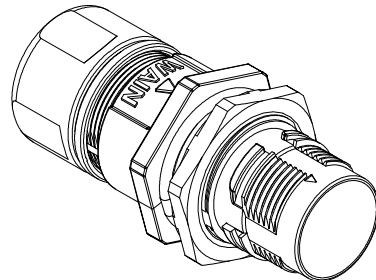


日期/Date		档案员 Filing Clerk	1		2		3		4		5		6	
插针数 Contacts		电缆出口直径φ Cable outlet	产品料号 Cable outlet	型号 Part Code	重量 Weight		针位排布图/Contact arrangement				面板安装尺寸/Panel Cut-out			
4(3+PE)	6-9.5 mm	1650047100500	M17-MC04-CCT/R-D9.5-SH	61.6g		FC04(母)		MC04(公)						
	9.5-12 mm	1650047102502	M17-MC04-CCT/R-D12-SH	59.1g										
	6-9.5 mm	1650047202502	M17-FC04-CCT/R-D9.5-SH	60.8g										
	9.5-12 mm	1650047202503	M17-FC04-CCT/R-D12-SH	58.3g										
技术参数: - 产品系列: M17 - 插针数: 4 - 插针分布: 3+PE - 插针直径(mm): ø1.5 - 接线范围(mm²): 0.35-2.5 - 接线方式: 冷压连接 - 额定电流(25℃): 20A - 额定电压: 630V - 额定脉冲电压: 6KV - 过电压保护等级: III - 污染等级: 3 - 插针需单独订购.														
机械参数: - 外壳材质: 铜合金, 锌合金 - 外壳表面处理: 镀镍 - 插芯材质: PBT - 密封材质: 氟橡胶 - 温度范围: -40℃...+130℃ - 电缆直径: ø6-12mm - 插拔次数: >500 - 防护等级: IP67														
Technical specification: - Series: M17 - Number of contacts: 4 - Contact arrangement: 3+PE - Contact diameter(mm): ø1.5 - Wire gauge(mm²/AWG): 0.35-2.5 - Terminal: Crimp - Rated current(25℃): 20A - Rated voltage: 630V - Rated impulse voltage: 6KV - Overvoltage category: III - Pollution degree: 3														
Mechanical specification: - Material of housing: CuZn,Zinc(GD-Zn) - Finish of housing: Nickel-plated - Material of Insert: PBT - Material of sealing: FPM - Temperature range: -40℃...+130℃ - Cable Outlet: ø6-12mm - Mating cycles: >500 - Degree of protection: IP67 - Contact need to be ordered separately.														
标记 Mark		处数 Number	变更描述/Description			签名 Signature		日期 Date		表面处理 Finish		图号 Drawing No.		
姓名/Name		日期/Date			姓名/Name		日期/Date		材料 Material		产品代号 Part Code			
绘图 Drawn		ZH SU 16.03.2022			标准 Stand.		—		比例 Scale		M17-XC04-CCT/R-Dxx-SH			
审核 Checked		ZQ XU 16.03.2022			—		—		版本 REV.		产品料号 Part No.			
工艺 Process		—			批准 Approved		HQ ZHANG 16.03.2022		重量 Weight		—			
									数量 Qty.		—			
									All Dimensions in mm Original Size DIN A 4		产品名称 Part Name			
											厦门唯恩电气有限公司 XIAMEN WAIN ELECTRICAL CO.LTD			