



日期/Date		档案员 Filing Clerk		1		2		3		4		5		6				
产品代号 Part code		产品料号 Part NO.		线径/Wire Gauge mm ² AWG		d	D	剥线长度 Stripping length	标识 Identification	标识图 Identification No.	重量/Weight g	No.	No.1	No.2	No.3	No.4	No.5	No.6
ZCEGF-0.37G	1010192200311	0.14-0.37	26-22	0.90	1.8	7.5	no groove	No.1	1.37	标示图 Marked Graph								
ZCEGF-0.5G	1010192200411	0.5	20	1.15	2.6	7.5	no groove	No.1	1.52									
ZCEGF-0.75G	1010192200611	0.75	18	1.30	2.6	7.5	1 groove	No.2	1.54									
ZCEGF-1.0G	1010192200811	1.0	18	1.45	2.6	7.5	1 groove	No.3	1.54									
ZCEGF-1.5G	1010192200911	1.5	16	1.75	3.0	7.5	2 groove	No.4	1.58									
ZCEGF-2.5G	1010192201011	2.5	14	2.25	3.5	7.5	3 groove	No.5	1.62									
ZCEGF-3.0G	1010192201111	3.0	12	2.55	3.7	7.5	wide groove	No.6	1.54									
ZCEGF-4.0G	1010192201211	4.0	12	2.85	3.9	7.5	no groove	No.1	1.55									

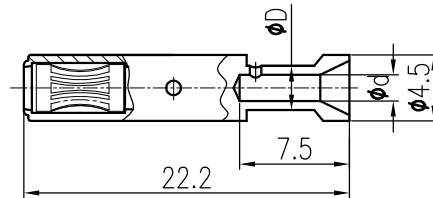

						表面处理 Finish	—				图号 Drawing No.	—
						材料 Material	—				产品代号 Part Code	ZCEGF-0.37G
标记 Mark	处数 Number	变更描述/Description			签名 Signature						日期 Date	产品料号 Part No.
	姓名/Name	日期/Date		姓名/Name	日期/Date	比例 Scale	版本 REV.	重量 Weight	数量 Qty.	产品名称 Part Name	—	
绘图 Drawn	BQ LUO	18.10.2010	标准化 Stand.	—	—	2:1	V1.1	1.37g	—			
审核 Checked	P RAO	18.10.2010										
工艺 Process	—	—	批准 Approved	YY LIN	18.10.2010	 			All Dimensions in mm Original Size DIN A 4			
 厦门唯恩电气有限公司 XIAMEN WAIN ELECTRICAL CO.LTD												

技术参数:

- 材料: 铜合金
- 表面处理: 镀金
- 额定电流: 16A
- 接触电阻: $\leq 1\text{m}\Omega$
- 线径范围: $0.14\text{--}0.37\text{mm}^2$ (26-22 AWG)
- 可插拔次数: ≥ 500

Technical specification:

- Material: copper alloy
- Surface: hard-gold plated
- Rated current: 16A
- Contact resistance: $\leq 1\text{m}\Omega$
- Wire gauge: 0.14–0.37mm²(26–22 AWG)
- Mating cycles: ≥ 500