



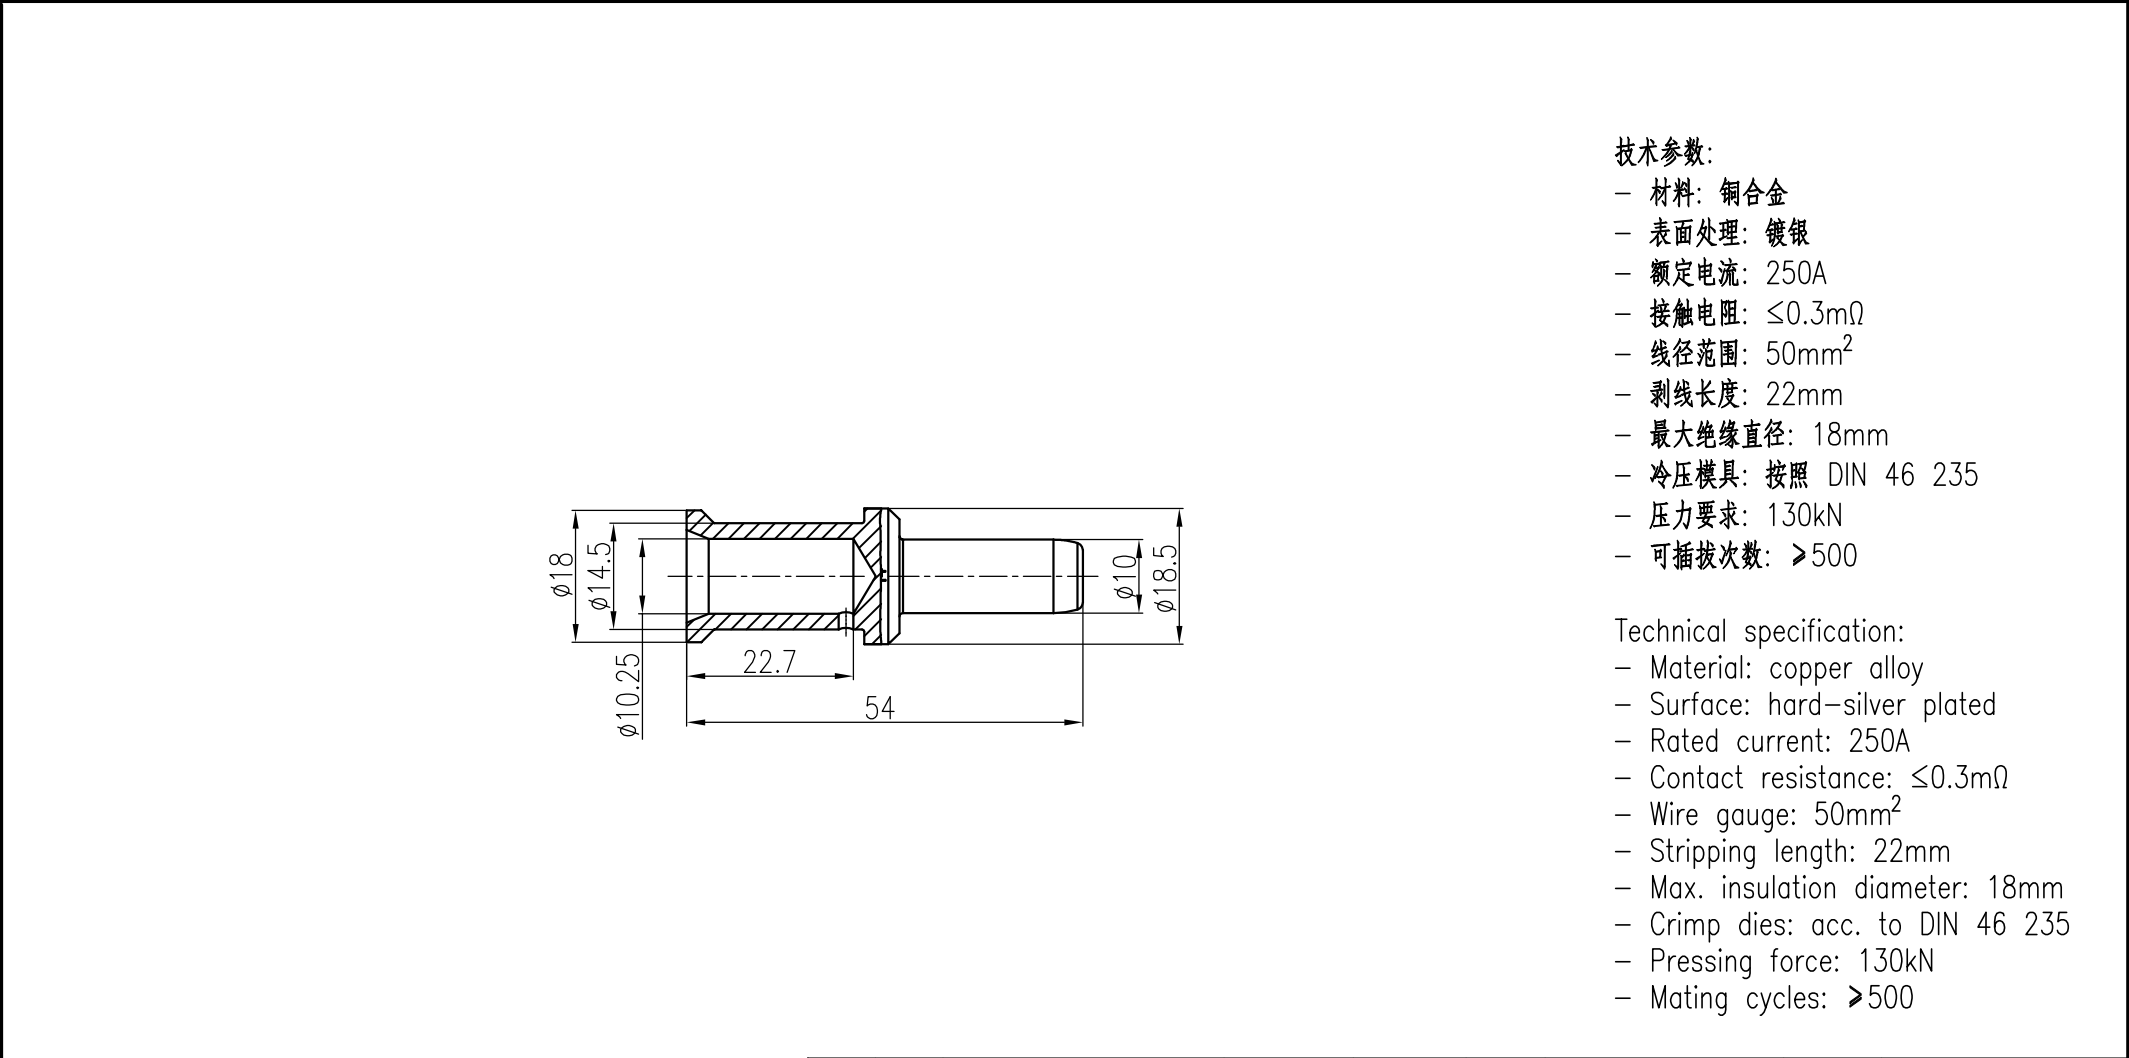

- 技术参数:
- 材料: 铜合金
 - 表面处理: 镀银
 - 额定电流: 250A
 - 接触电阻: $\leq 0.3\text{m}\Omega$
 - 线径范围: 50mm^2
 - 剥线长度: 22mm
 - 最大绝缘直径: 18mm
 - 冷压模具: 按照 DIN 46 235
 - 压力要求: 130kN
 - 可插拔次数: ≥ 500

- Technical specification:
- Material: copper alloy
 - Surface: hard-silver plated
 - Rated current: 250A
 - Contact resistance: $\leq 0.3\text{m}\Omega$
 - Wire gauge: 50mm^2
 - Stripping length: 22mm
 - Max. insulation diameter: 18mm
 - Crimp dies: acc. to DIN 46 235
 - Pressing force: 130kN
 - Mating cycles: ≥ 500



						表面处理 Finish	—			图号 Drawing No.	—				
						材料 Material	—			产品代号 Part Code	CHSM250—50				
标记 Mark	处数 Number	变更描述/Description			签名 Signature					日期 Date	产品料号 Part No.	1010281101801			
	姓名/Name	日期/Date		姓名/Name	日期/Date					比例 Scale	版本 REV.	重量 Weight	数量 Qty.	产品名称 Part Name	—
绘图 Drawn	BQ LUO	18.10.2010	标准化 Stand.	—	—					1:1	V1.1	47.2g	—	 厦门唯恩电气有限公司 XIAMEN WAIN ELECTRICAL CO.LTD	
审核 Checked	P RAO	18.10.2010													
工艺 Process	—	—	批准 Approved	YY LIN	18.10.2010	 All Dimensions in mm Original Size DIN A 4									