

Date  
 日期

1

2




3

4

5

6

SECTION A-A

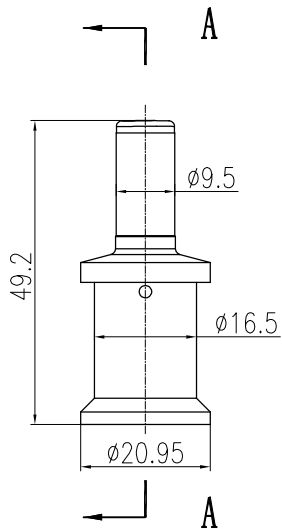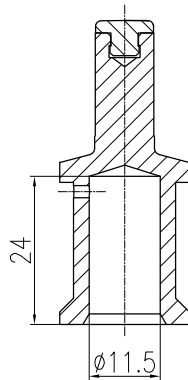

技术参数:

- 接线方式: 冷压连接
- 材料: 铜合金
- 表面处理: 镀银
- 接触电阻:  $\leq 0.3m\Omega$
- 线径范围:  $70mm^2$
- 工具:
  - 冷压钳: TL05
- 剥线长度: 23.5mm  
 (当电缆绝缘层外径  $\geq 22mm$ , 剥线长度为31mm)

Technical specification:

- Terminal: crimp terminal
- Material: copper alloy
- Surface: hard-silver plated
- Contact resistance:  $\leq 0.3m\Omega$
- Wire gauge:  $70mm^2$
- Tools:
  - Crimp contact tool: TL05
- Stripping length: 23.5mm  
 (When the outer diameter of the cable insulation layer is greater than 22mm; Stripping length: 31mm)

						表面处理 Finish		-		图号 Drawing No.	-
						材料 Material		-		产品代号 Part Code	CHSM300-70
标记 Mark	次数 Number	变更描述/Description		签名 Signature	日期 Date	比例 Scale		版本 REV.	重量 Weight	数量 Qty.	产品料号 Part No.
		姓名/Name	日期/Date	姓名/Name	日期/Date	1:1	V1.1	45.8g	-		1010411101950
绘图 Drawn		PH CHEN	10.01.2023	标准化 Stand.							产品名称 Part Name
审核 Checked		HZ LAN	10.01.2023								-
工艺 Process				批准 Approved	HQ ZHANG	10.01.2023	All Dimensions in mm Original Size DIN A 4		厦门唯恩电气有限公司 XIAMEN WAIN ELECTRICAL CO.LTD		

1

2

3

4

5

6