
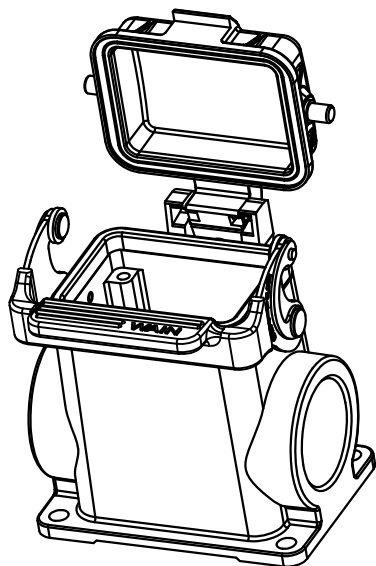


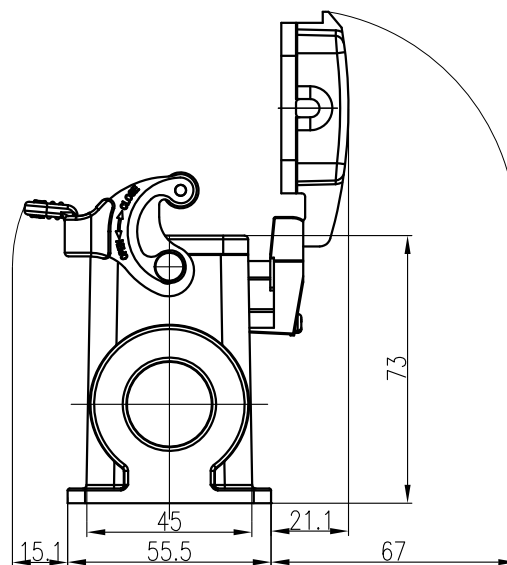

- Material: aluminium die-cast
- Material,cover: aluminium die-cast
- Surface: powder-coated
- Colour: RAL 7037(grey)
- Temperature range:  $-40^{\circ}\text{C}$  –  $+125^{\circ}\text{C}$
- Degree of protection: IP65  
(acc.to IEC 60529 for coupled connector)
- Cable entry: side entry
- No. of cable entries: 2
- Thread size: M32
- Locking element:
  - Locking type: single locking latch
  - material: stainless steel+TPR
- Hoods/Housings sealing: NBR

|               |              |                  |                |         |                 |                                                                                       |            |                                               |                  |                                                                                                                                   |                        |
|---------------|--------------|------------------|----------------|---------|-----------------|---------------------------------------------------------------------------------------|------------|-----------------------------------------------|------------------|-----------------------------------------------------------------------------------------------------------------------------------|------------------------|
|               |              |                  |                |         |                 | 表面处理<br>Finish                                                                        |            | —                                             |                  | 图号<br>Drawing No.                                                                                                                 | —                      |
|               |              |                  |                |         |                 | 材料<br>Material                                                                        |            | —                                             |                  | 产品代号<br>Part Code                                                                                                                 | H6B-SFH-1L/SC-MCV-2M32 |
| 标记<br>Mark    | 处数<br>Number | 变更描述/Description |                |         | 签名<br>Signature | 日期<br>Date                                                                            |            |                                               | 产品料号<br>Part No. | 1110062615124                                                                                                                     |                        |
|               | 姓名/Name      | 日期/Date          |                | 姓名/Name | 日期/Date         | 比例<br>Scale                                                                           | 版本<br>REV. | 重量<br>Weight                                  | 数量<br>Qty.       | 产品名称<br>Part Name                                                                                                                 | —                      |
| 绘图<br>Drawn   | SL CHEN      | 18.10.2010       | 标准化<br>Stand.  | —       | —               | 1:2                                                                                   | V1.1       | 350g                                          | —                |                                                                                                                                   |                        |
| 审核<br>Checked | P RAO        | 18.10.2010       |                |         |                 |                                                                                       |            |                                               |                  |                                                                                                                                   |                        |
| 工艺<br>Process | —            | —                | 批准<br>Approved | YY LIN  | 18.10.2010      |  |            | All Dimensions in mm<br>Original Size DIN A 4 |                  |  厦门唯恩电气有限公司<br>XIAMEN WAIN ELECTRICAL CO.LTD |                        |