
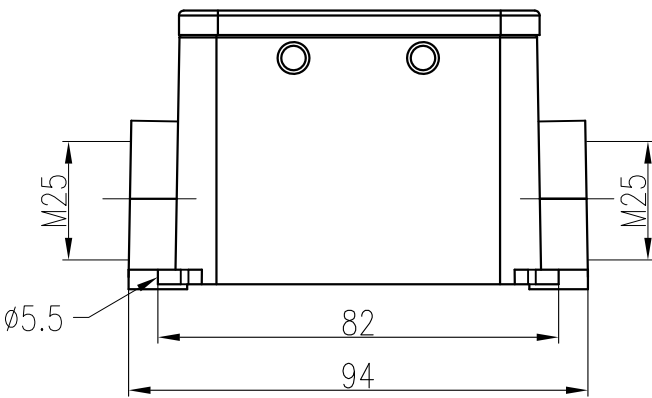


	日期/Date	档案员 Filing Clerk	1	2	3	4	5	6
D								
C								
B								
A								

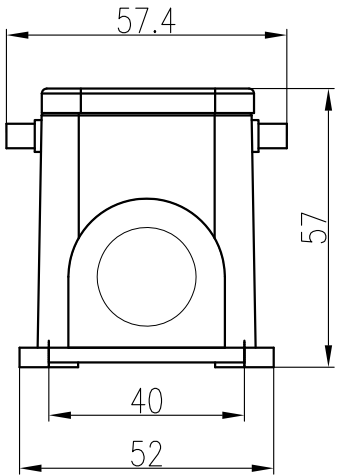


Technical parameters:

- Material: Die-cast aluminium
- Surface treatment: Powder coating
- Colour: RAL 7037 (Grey)
- Temperature range: -40℃ - +125℃
- Degree of protection: IP65 (Interlocked status, IEC 60529)
- Sealing element: NBR
- Cable entry direction: Side entry
- Cable entry holes: 2
- Thread specification: M25

Technical specification:

- Material: aluminium die-cast
- Surface: powder-coated
- Colour: RAL 7037(grey)
- Temperature range: -40℃ - +125℃
- Degree of protection: IP65 (acc.to IEC 60529 for coupled connector)
- Hoods/Housings sealing: NBR
- Cable entry: side entry
- No. of cable entries: 2
- Thread size: M25

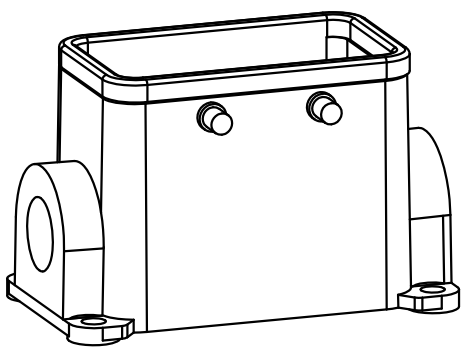

						表面处理 Finish	—			图号 Drawing No.	—
						材料 Material	—			产品代号 Part Code	H10B-SF-4B-2M25
标记 Mark	处数 Number	变更描述/Description			签名 Signature	日期 Date	比例 Scale	版本 REV.	重量 Weight	数量 Qty.	产品料号 Part No.
绘图 Drawn	BQ LUO	18.10.2010	标准化 Stand.	—	—	2:3	V1.1	190g	—	—	1110102301023
审核 Checked	P RAO	18.10.2010									产品名称 Part Name
工艺 Process	—	—	批准 Approved	YY LIN	18.10.2010			All Dimensions in mm Original Size DIN A 4		厦门唯恩电气有限公司 XIAMEN WAIN ELECTRICAL CO.,LTD	

1	2	3	4	5	6
---	---	---	---	---	---