
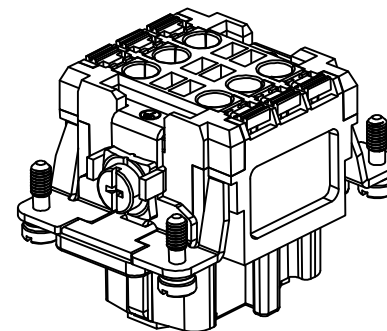
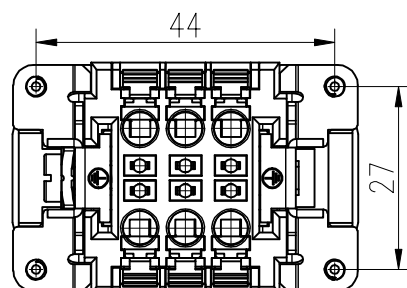

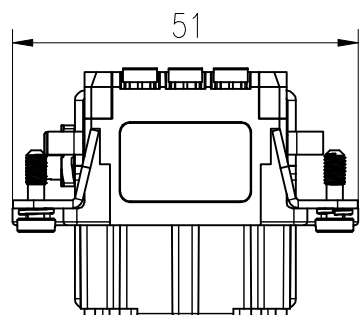


选配件/Apolegamy

产品代号/Part Code	产品料号/Part No.	备注/Remark
HEB/P-1T2	1980020070027	横向2Pin短接/Horizontal 2Pin short circuit
HEB/P-1T3	1980020070028	横向3Pin短接/Horizontal 3Pin short circuit
HEB/P-2T1	1980020070029	纵向2Pin短接/Longitudinal 2Pin short circuit

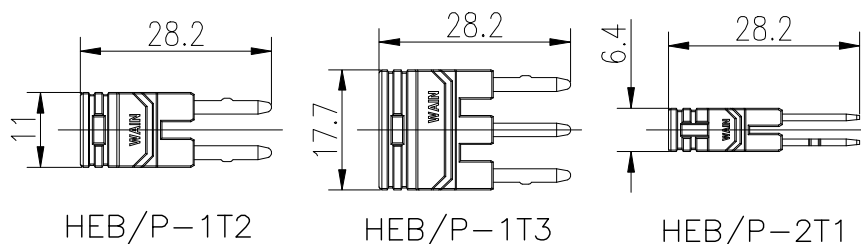

技术参数:

插芯:

- 插针数: 6+PE
- 额定电流: 16A
- 额定电压: 500V
- 额定脉冲电压: 6kV
- 污染等级: 3
- 依据UL/CSA的额定电压: 600V
- 绝缘阻抗: $\geq 10^{10}\Omega$
- 材料: 聚碳酸酯
- 颜色: RAL 7032 (浅灰色)
- 温度范围: $-40^{\circ}\text{C} \sim +125^{\circ}\text{C}$
- 依据UL 94的阻燃等级: V0
- 可插拔次数: ≥ 500
- 可实现短接功能 (选配)

插针:

- 接线方式: 弹片连接
- 材料: 铜合金
- 表面处理: 镀银
- 接触电阻: $\leq 3\text{m}\Omega$
- 线径范围: $0.5\sim 4\text{mm}^2$ (20-12 AWG)
- (带管形接线端子线径范围: $0.14\sim 2.5\text{mm}^2$ 26-14 AWG)
- 剥线长度: $9\frac{3}{4}\text{mm}$

Technical specification:

Insolers:

- No. of contact: 6+PE
- Rated current: 16A
- Rated voltage: 500V
- Rated impulse voltage: 6kV
- Pollution degree: 3
- Rated voltage acc.to UL/CSA: 600V
- Insulation resistance: $\geq 10^{10}\Omega$
- Material: polycarbonate
- Colour: RAL 7032(light grey)
- Temperature range: $-40^{\circ}\text{C} \sim +125^{\circ}\text{C}$
- Flammability acc.to UL 94: V0
- Mating cycles: ≥ 500
- Can realize short circuit function (optional)

Contacts:

- Terminal: spring terminal
- Material: copper alloy
- Surface: hard-silver plated
- Contact resistance: $\leq 3\text{m}\Omega$
- Wire gauge: $0.5\sim 4\text{mm}^2$ (20-12 AWG)
- (For wires with crimped female, wire gauge: $0.14\sim 2.5\text{mm}^2$ 26-14 AWG)
- Stripping length: $9\frac{3}{4}\text{mm}$

				表面处理	Finish		图号	DW2022083-108	
				材料	Material		产品代号	HE-006-FQ P	
标记	失效	变更描述/Description		签名	日期		产品料号	1220000990501	
Mark	Number	姓名/Name	日期/Date	姓名/Name	日期/Date	比例	版本	重量	数量
绘图	ZY YE	2023-2-3	标准化	-	-	Scale	REV.	Weight	Qty.
审核	HZ LAN	2023-2-3				1:1	01	44g	-
工艺	-	-	批准	HQ ZHANG	2023-2-3			All Dimensions in mm	
Process			Approved					Original Size DIN A 4	
								厦门唯恩电气有限公司	
								XIAMEN WAN ELECTRICAL CO.LTD	