
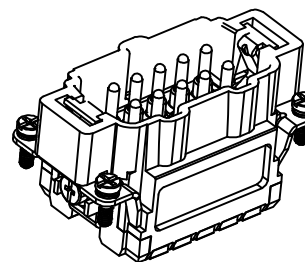
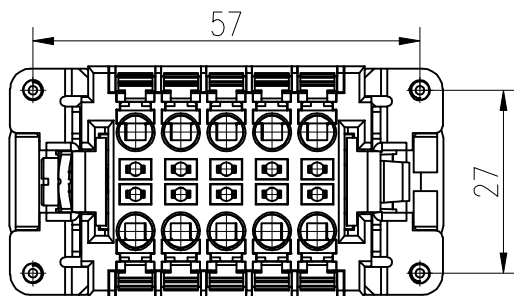
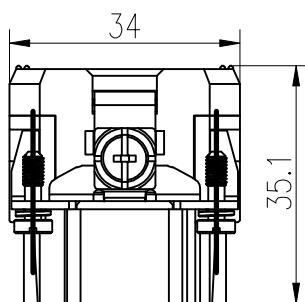
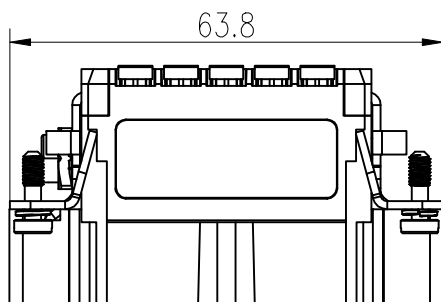


选配件/Apolegamy

产品代号/Part Code	产品料号/Part No.	备注/Remark
HEB/P-1T2	1980020070027	横向2Pin短接/Horizontal 2Pin short circuit
HEB/P-1T3	1980020070028	横向3Pin短接/Horizontal 3Pin short circuit
HEB/P-2T1	1980020070029	纵向2Pin短接/Longitudinal 2Pin short circuit

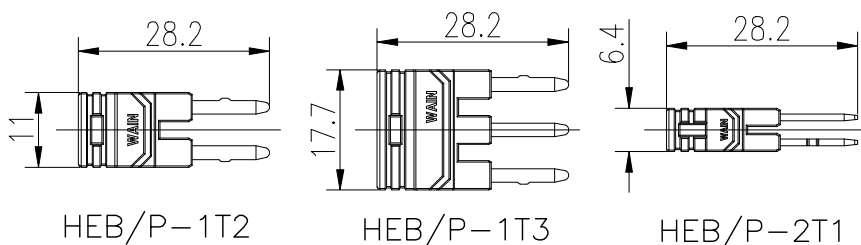

技术参数:

插芯:

- 插针数: 10+PE
- 额定电流: 16A
- 额定电压: 500V
- 额定脉冲电压: 6kV
- 污染等级: 3
- 依据UL/CSA的额定电压: 600V
- 绝缘阻抗: $\geq 10^{10}\Omega$
- 材料: 聚碳酸酯
- 颜色: RAL 7032 (浅灰色)
- 温度范围: $-40^{\circ}\text{C} \sim +125^{\circ}\text{C}$
- 依据UL 94的阻燃等级: V0
- 可插拔次数: ≥ 500
- 可实现短接功能 (选配)

插针:

- 接线方式: 弹片连接
- 材料: 铜合金
- 表面处理: 镀银
- 接触电阻: $\leq 3\text{m}\Omega$
- 线径范围: $0.5\sim 4\text{mm}^2$ (20-12 AWG)
- 带管形接线端子线径范围: $0.14\sim 2.5\text{mm}^2$ (28-14 AWG)
- 剥线长度: $9\pm 0.3\text{mm}$

Technical specification:

Inserts:

- No. of contact: 10+PE
- Rated current: 16A
- Rated voltage: 500V
- Rated impulse voltage: 6kV
- Pollution degree: 3
- Rated voltage acc.to UL/CSA: 600V
- Insulation resistance: $\geq 10^{10}\Omega$
- Material: polycarbonate
- Colour: RAL 7032(light grey)
- Temperature range: $-40^{\circ}\text{C} \sim +125^{\circ}\text{C}$
- Flammability acc.to UL 94: V0
- Mating cycles: ≥ 500
- Can realize short circuit function (optional)

Contacts:

- Terminal: spring terminal
- Material: copper alloy
- Surface: hard-silver plated
- Contact resistance: $\leq 3\text{m}\Omega$
- Wire gauge: $0.5\sim 4\text{mm}^2$ (20-12 AWG)
- (For wires with crimped ferrule, wire gauge: $0.14\sim 2.5\text{mm}^2$ (28-14 AWG))
- Stripping length: $9\pm 0.3\text{mm}$

						表面处理 Finish		—		图号 Drawing No.	DW2022083-109
						材料 Material		—		产品代号 Part Code	HE-010-MQ P
标记 Mark	数量 Number	变更描述/Description			签名 Signature	日期 Date				产品料号 Part No.	1220000990502
	姓名/Name	日期/Date		姓名/Name	日期/Date	比例 Scale	版本 REV.	重量 Weight	数量 Qty.	产品名称 Part Name	HE-010-MQ P,成品
绘图 Drawn	ZY YE	2023-2-3	标准化 Stand.	—	—	1:1	01	56.63g	—	 厦门唯恩电气有限公司 XIAMEN WAIN ELECTRICAL CO.LTD	
审核 Checked	HZ LAN	2023-2-3									
工艺 Process	—	—	批准 Approved	HQ ZHANG	2023-2-3						
						 		All Dimensions in mm Original Size DIN A 4			