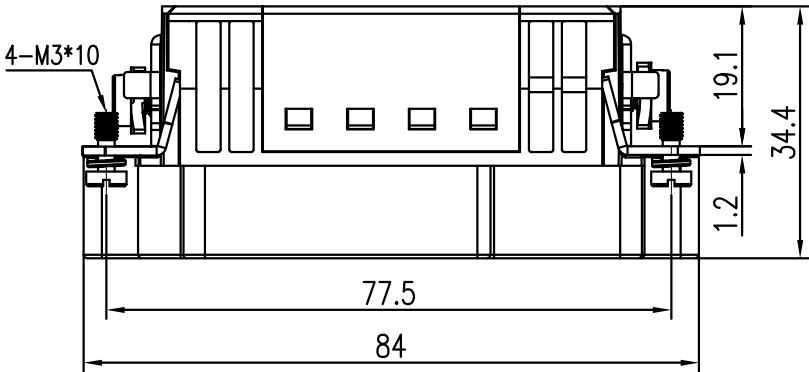
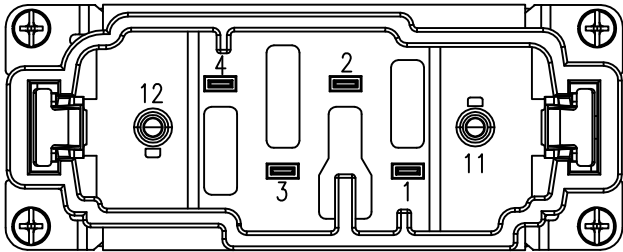


技术参数:


插芯:

- 插针数: 4/2+PE
- 额定电流: 40A/16A
- 额定电压: 690V/500V
- 额定脉冲电压: 6KV/6KV
- 污染等级: 3
- 绝缘阻抗: $\geq 10^{10}\Omega$
- 材料: 聚碳酸酯
- 颜色: RAL 7032 (浅灰色)
- 温度范围: $-40^{\circ}\text{C} - +125^{\circ}\text{C}$
- 依据UL 94的阻燃等级: V0
- 可插拔次数: ≥ 500
- 插针:
 - 接线方式: 簧片连接
 - 材料: 铜合金
 - 表面处理:
 - 镀银
 - 接触电阻: $\leq 3\text{m}\Omega$
 - 线径范围: $0.5-2.5\text{mm}^2(20-14\text{AWG})$
 $0.5-6\text{mm}^2(20-10\text{AWG})$
 - 剥线长度: 12.5mm/12mm

Technical specification:

Inserts:

- No. of contact: 4/2+PE
- Rated current: 40A/16A
- Rated voltage: 690V/500V
- Rated impulse voltage: 6KV/6KV
- Pollution degree: 3
- Insulation resistance: $\geq 10^{10}\Omega$
- Material: polycarbonate
- Colour: RAL 7032(light grey)
- Temperature range: $-40^{\circ}\text{C} - +125^{\circ}\text{C}$
- Flammability acc.to UL 94: V0
- Mating cycles: ≥ 500
- Contacts:
 - Terminal: spring terminal
 - Material: copper alloy
 - Surface:
 - Hard-silver plated
 - Contact resistance: $\leq 3\text{m}\Omega$
 - Wire gauge: $0.5-2.5\text{mm}^2(20-14\text{AWG})$
 $0.5-6\text{mm}^2(20-10\text{AWG})$
 - Stripping length: 12.5mm/12mm

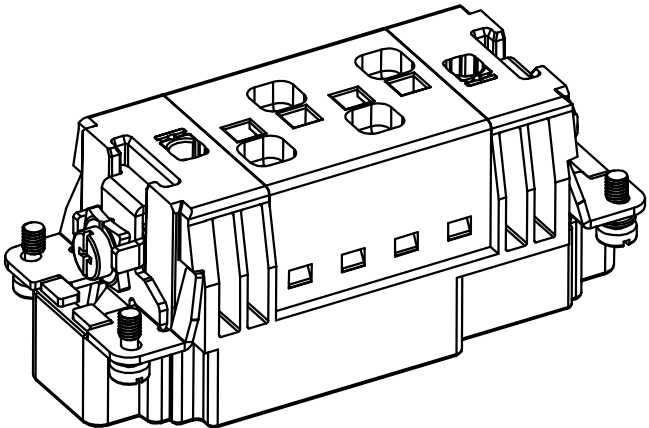

						表面处理 Finish		—		图号 Drawing No.	—
						材料 Material		—		产品代号 Part Code	HSB-004/2-MQ
标记 Mark	处数 Number	变更描述/Description			签名 Signature	日期 Date				产品料号 Part No.	1270060010001
绘图 Drawn	姓名/Name	日期/Date	标准化 Stand.	姓名/Name	日期/Date	比例 Scale	版本 REV.	重量 Weight	数量 Qty.	产品名称 Part Name	—
	审核 Checked	Q GAO		13.12.2023			1:1	V1.1	77.5g	—	
工艺 Process	—	—	批准 Approved	HQ ZHANG	13.12.2023	 		All Dimensions in mm Original Size DIN A 4		 厦门唯恩电气有限公司 XIAMEN WAIN ELECTRICAL CO.,LTD	