
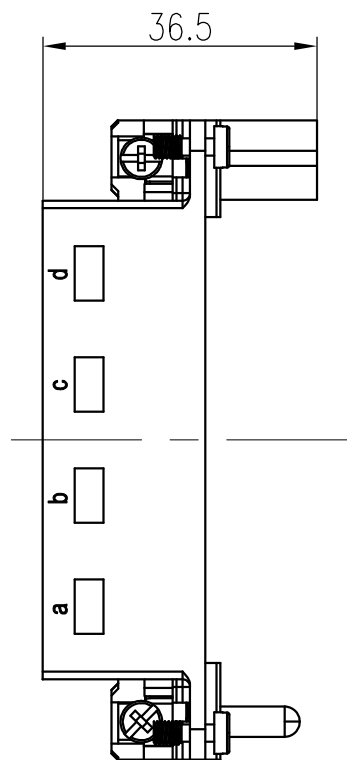
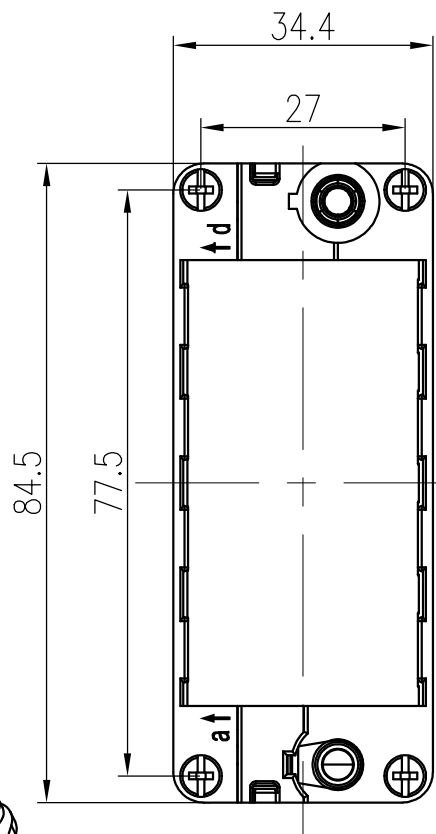


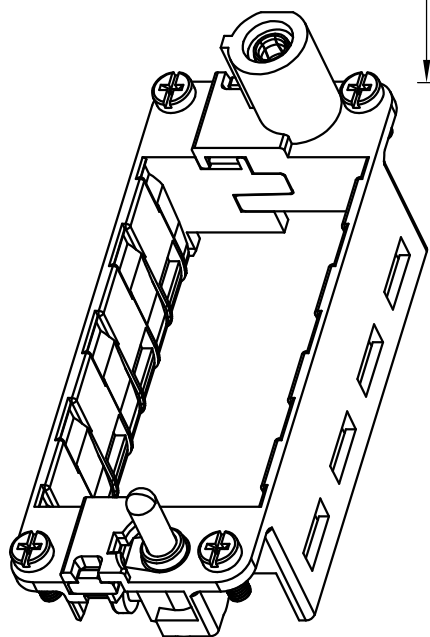

技术参数:

- 模块数量: 4
- 接地线:
 - 功率线: 4-10mm²(12-8 AWG)
 - 信号线: 1-2.5mm²(18-14 AWG)
- 材料: 压铸锌
- 温度范围: -40℃ - +125℃
- 可插拔次数: ≥500

Technical specification:

- No. of module: 4
- Wire gauge(PE contact):
 - Power side: 4-10mm²(12-8 AWG)
 - Signal side: 1-2.5mm²(18-14 AWG)
- Material: zinc die-cast
- Temperature range: -40℃ - +125℃
- Mating cycles: ≥500

						表面处理 Finish	—			图号 Drawing No.	—	
										产品代号 Part Code	HF16B—NLA2	
标记 Mark	处数 Number	变更描述/Description		签名 Signature	日期 Date	材料 Material	—			产品料号 Part No.	1290160001001	
										产品名称 Part Name	—	
	姓名/Name	日期/Date		姓名/Name	日期/Date	比例 Scale	版本 REV.	重量 Weight	数量 Qty.			
绘图 Drawn	ZL CHEN	12.01.2019	标准化 Stand.	—	—	1:1	V1.2	64g	—			
审核 Checked	P RAO	12.01.2019										
工艺 Process	—	—	批准 Approved	HQ ZHANG	12.01.2019	 			All Dimensions in mm Original Size DIN A 4			
											厦门唯恩电气有限公司 XIAMEN WAIN ELECTRICAL CO.LTD	