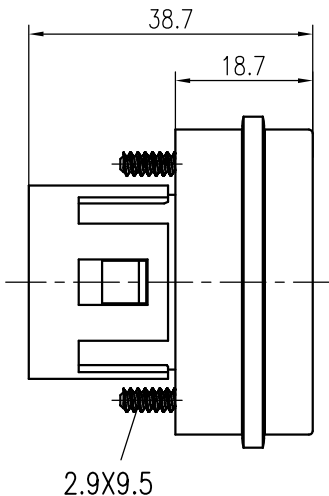
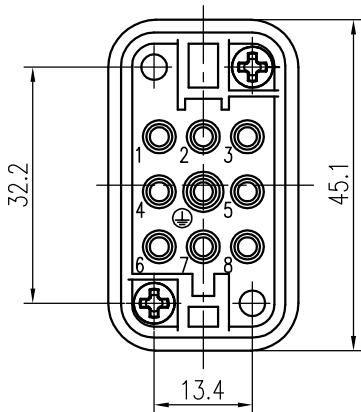


技术参数:

新芯:

- 插针数: 8+PE
- 额定电流: 16A
- 额定电压: 500V
- 额定脉冲电压: 6kV
- 污染等级: 3
- 安装金属外壳时: 16A 230/400V 4kV 3
- 依据UL/CSA的额定电压: 600V
- 绝缘阻抗: $>10^{10}\Omega$
- 材料: 聚碳酸酯
- 颜色: RAL 7032 (浅灰色)
- 温度范围: $-40^{\circ}\text{C} - +125^{\circ}\text{C}$
- 依据UL 94的阻燃等级: V0
- 可插拔次数: >500

插针:

- 接线方式: 冷压连接
- 材料: 铜合金
- 表面处理:
 - 镀银
 - 镀金
- 接触电阻: $\leq 1\text{m}\Omega$
- 线径范围:
 - 冷压连接: $0.14-4\text{mm}^2(26-12\text{ AWG})$
 - 部分装备情况下可达到 4mm^2
- 附件:
 - 保险延迟针:
 - CESM-1.0R/CESM-1.5R/CESM-2.5R
 - 冷压钳:
 - TL02G(0.5-4mm²)
 - TL02(0.14-0.37mm²)
 - 退针器: TL01
 - 编码元件: CODE-E

Technical specification:

Insters:

- No. of contact: 8+PE
- Rated current: 16A
- Rated voltage: 500V
- Rated impulse voltage: 6kV
- Pollution degree: 3
- Mounted metal hood: 16A 230/400V 4kV 3
- Rated voltage acc.to UL/CSA: 600V
- Insulation resistance: $\geq 10^{10}\Omega$
- Material: polycarbonate
- Colour: RAL 7032(light grey)
- Temperature range: $-40^{\circ}\text{C} - +125^{\circ}\text{C}$
- Flammability acc.to UL 94: V0
- Mating cycles: ≥ 500

Contacts:

- Terminal: crimp terminal
- Material: copper alloy
- Surface:
 - Hard-silver plated
 - Hard-gold plated
- Contact resistance: $\leq 1\text{m}\Omega$
- Wire gauge:
 - Crimp terminal: $0.14-4\text{mm}^2(26-12\text{ AWG})$
 - partly loaded up to 4mm^2 is possible

Accessories:

- Relay contacts:
 - CESM-1.0R/CESM-1.5R/CESM-2.5R
- Crimping tool:
 - TL02G(0.5-4mm²)
 - TL02(0.14-0.37mm²)
- Contact removal tool: TL01
- Coding element: CODE-E

						表面处理 Finish	—			图号 Drawing No.	—
						材料 Material	—			产品代号 Part Code	HQ-008/0-MC
标记 Mark	处数 Number	变更描述/Description			签名 Signature	日期 Date	比例 Scale	版本 REV.	重量 Weight	数量 Qty.	产品料号 Part No.
绘图 Drawn	Y L GAO	20.01.2024	标准化 Stand.	—	—	—	1:1	V1.1	15.8g	—	产品名称 Part Name
审核 Checked	Q GAO	20.01.2024									—
工艺 Process	—	—	批准 Approved	HQ ZHANG	20.01.2024						
							All Dimensions in mm Original Size DIN A 4		厦门唯恩电气有限公司 XIAMEN WAIN ELECTRICAL CO.LTD		