
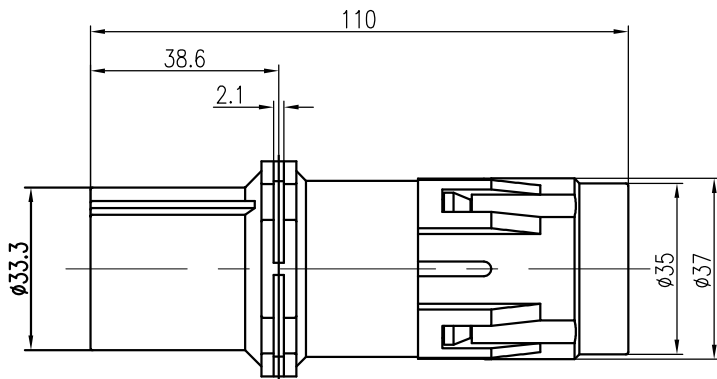




技术参数:

插芯:

- 插针数: 1

- 额定电流:

· 不带适配器: 650A

- 额定电压: 4000V

- 额定脉冲电压: 18kV

- 污染等级: 3

- 绝缘阻抗: $>10^{10}\Omega$

- 材料: 聚酰胺

- 颜色: RAL 9002 (浅白色)

- 温度范围: $-40^{\circ}\text{C} - +125^{\circ}\text{C}$

- 依据UL 94的阻燃等级: V0

- 可插拔次数: >500

插针:

- 接线方式: 轴向螺栓连接

- 材料: 铜合金

- 表面处理: 镀银

- 接触电阻: $<0.2\text{m}\Omega$

- 电缆绞线依据: IEC 60 228-5

轴向螺栓连接:

- 横截面: $70-120\text{mm}^2/150-185\text{mm}^2$

- 剥线长度: 23-25mm

- 最大电缆直径: 26.5mm

- 拧紧力矩:

· mm^2 : 70 95 120 150 185

· $\text{N}\cdot\text{m}$: 12 14 16 17 18

螺栓连接:

- 螺纹: M12

- 拧紧力矩: $16-18\text{N}\cdot\text{m}$

固定框架:

- 材料: 不锈钢

- 外壳固定螺丝的拧紧力矩: $0.5\text{N}\cdot\text{m}$

Technical specification:

Insters:

- No. of contact: 1

- Rated current:

· Without adapter: 650A

- Rated voltage: 4000V

- Rated impulse voltage: 18kV

- Pollution degree: 3

- Insulation resistance: $\geq 10^{10}\Omega$

- Material: polyamide

- Colour: RAL 9002(grey white)

- Temperature range: $-40^{\circ}\text{C} - +125^{\circ}\text{C}$

- Flammability acc.to UL 94: V0

- Mating cycles: ≥ 500

Contacts:

- Terminal: axial screw terminal

- Material: copper alloy

- Surface: hard-silver plated

- Contact resistance: $\leq 0.2\text{m}\Omega$

- For stranded wire acc. to: IEC 60 228-5

Axial screw termination:

- Wire gauge: $70-120\text{mm}^2/150-185\text{mm}^2$

- Stripping length: 23-25mm

- Max. cable diameter: 26.5mm

- Tightening torque:

· mm^2 : 70 95 120 150 185

· $\text{N}\cdot\text{m}$: 12 14 16 17 18

Screw terminal:


- Thread: M12

- Tightening torque: $16-18\text{N}\cdot\text{m}$

Frame:

- Material: stainless steel

- Tightening torque of the fixing screws: $0.5\text{N}\cdot\text{m}$



						表面处理 Finish	—	图号 Drawing No.	—
						材料 Material	—	产品代号 Part Code	HC650.185-F
标记 Mark	处数 Number	变更描述/Description			签名 Signature	日期 Date		产品料号 Part No.	1310010210202
	姓名/Name	日期/Date		姓名/Name	日期/Date	比例 Scale	版本 REV.	重量 Weight	数量 Qty.
绘图 Drawn	BQ LUO	18.03.2019	标准化 Stand.	—	—	2:3	V1.2	261.57g	—
审核 Checked	HZ LAN	18.03.2019							
工艺 Process	—	—	批准 Approved	HQ ZHANG	18.03.2019				
							All Dimensions in mm Original Size DIN A 4		
							WAIN 厦门唯恩电气有限公司 XIAMEN WAIN ELECTRICAL CO.LTD		