
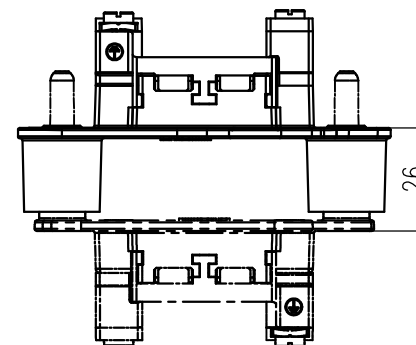
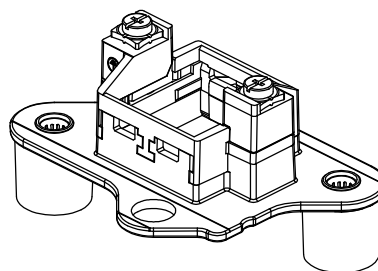
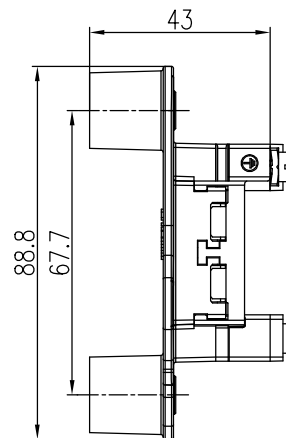
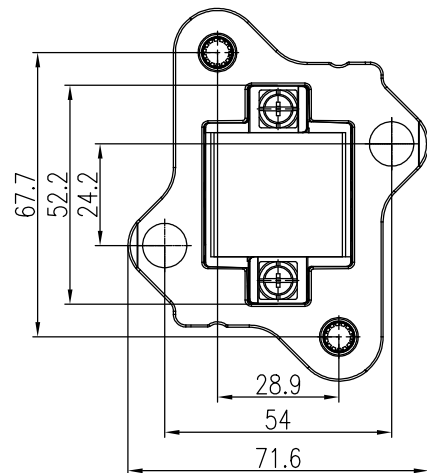


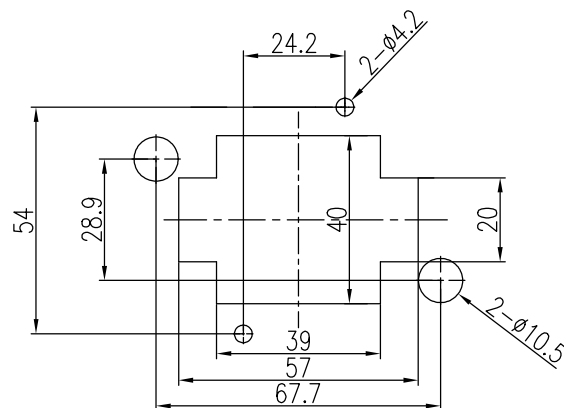

插合距离26mm

开孔尺寸图
(Panel cut out)

技术参数:

- 模块数量: 2+PE
- 材料: 压铸铝
- 温度范围: -40°C - $+125^{\circ}\text{C}$
- 浮动公差: $\pm 2\text{mm}$
- 可插拔次数: >500
- 备注: 如果全部装配气动模块时, 对插时需注意正确的模块位置

Technical specification:

- No. of module: 2+PE
- Material: zinc die-cast
- Temperature range: -40°C - $+125^{\circ}\text{C}$
- Floating Tolerance: $\pm 2\text{mm}$
- Mating cycles: >500
- Note: If the modules be assembled are all pneumatic modules, pay attention to the correct module position when mating.

						表面处理 Finish	—			图号 Drawing No.	—
						材料 Material	—			产品代号 Part Code	HF6B—FADK
标记 Mark	处数 Number	变更描述/Description			签名 Signature	日期 Date				产品料号 Part No.	1310060001005
	姓名/Name	日期/Date		姓名/Name	日期/Date	比例 Scale	版本 REV.	重量 Weight	数量 Qty.	产品名称 Part Name	—
绘图 Drawn	SY JI	20.02.2020	标准化 Stand.	—	—	2:3	V1.1	153g	—		
审核 Checked	HZ LAN	20.02.2020									
工艺 Process	—	—	批准 Approved	HQ ZHANG	20.02.2020	 		All Dimensions in mm Original Size DIN A 4		 厦门唯恩电气有限公司 XIAMEN WAIN ELECTRICAL CO.LTD	