



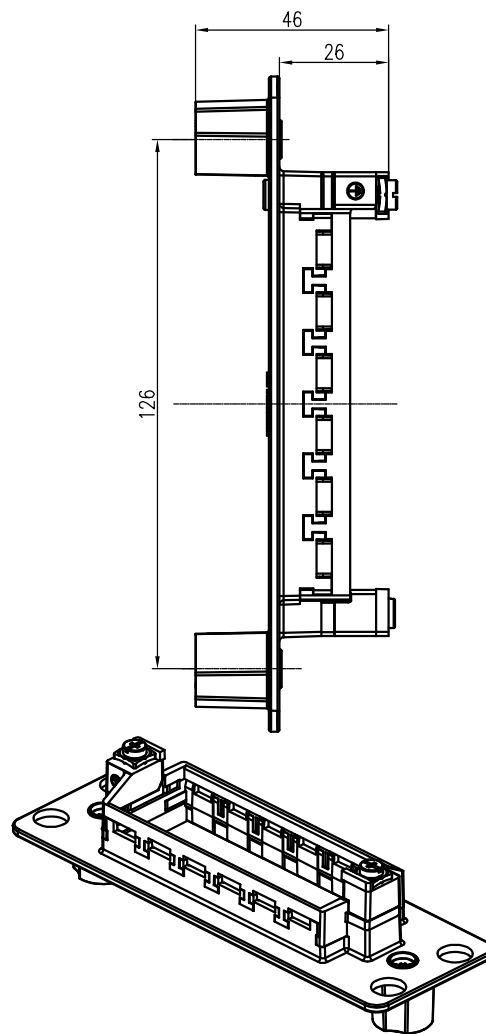


技术参数:

- 模块数量: 6+PE
- 材料: 压铸铝
- 温度范围: -40°C - $+125^{\circ}\text{C}$
- 浮动公差: $\pm 2\text{mm}$
- 可插拔次数: ≥ 500
- 备注: 如果全部装配气动模块时, 对插时需注意正确的模块位置

Technical specification:

- No. of module: 6+PE
- Material: zinc die-cast
- Temperature range: -40°C - $+125^{\circ}\text{C}$
- Floating Tolerance: $\pm 2\text{mm}$
- Mating cycles: >500
- Note: If the modules be assembled are all pneumatic modules, pay attention to the correct module position when mating.

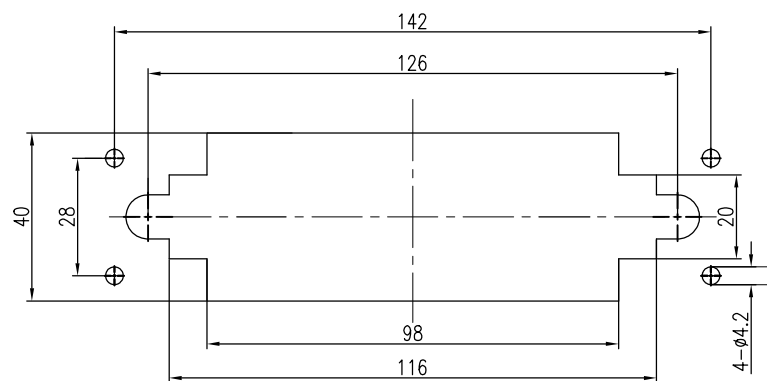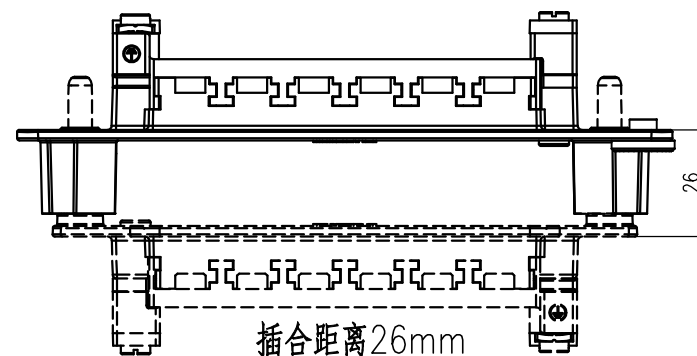

开孔尺寸图

					表面处理 Finish	—				图号 Drawing No.	—
					材料 Material	—				产品代号 Part Code	HF24B—FADK
标记 Mark	处数 Number	变更描述/Description		签名 Signature		日期 Date					产品料号 Part No.
	姓名/Name	日期/Date		姓名/Name	日期/Date	比例 Scale	版本 REV.	重量 Weight	数量 Qty.	产品名称 Part Name	—
绘图 Drawn	SY JI	11.26.2018	标准化 Stand.	—	—	2:3	V1.2	201g	—		
审核 Checked	HZ LAN	11.26.2018									
工艺 Process	—	—	批准 Approved	HQ ZHANG	11.26.2018	 			All Dimensions in mm Original Size DIN A 4		
											厦门唯恩电气有限公司 XIAMEN WAIN ELECTRICAL CO.LTD