

日期/Date


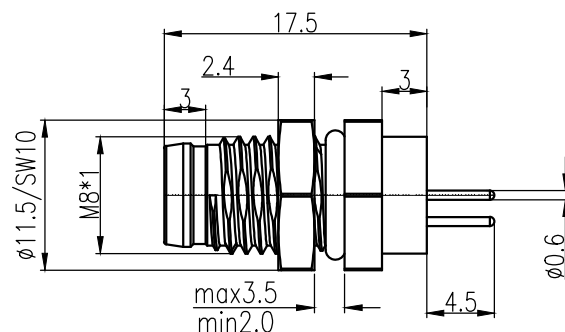
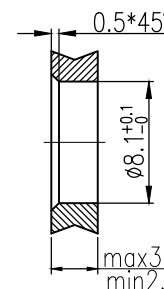
档案员
Filing Clerk

技术参数:

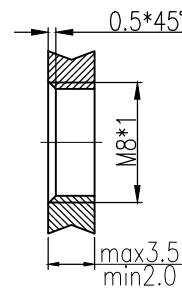
- 额定电流(40℃): 4A
- 额定电压: 60V
- 额定脉冲电压: 800V
- 插针数: 3
- 污染等级: 3
- 接触电阻: $\leq 10\text{m}\Omega$
- 绝缘电阻: $\geq 100\text{M}\Omega$
- 锁紧方式: 螺纹式M8*1
- 连接方式: 浸焊
- 防护等级: IP67
- 插拔次数: ≥ 100
- 温度范围: $-40^{\circ}\text{C} \dots +85^{\circ}\text{C}$
- 外壳材料: CuZn
- 插体材料: PA
- 插针材料: 铜合金
- 电镀材料: 金

Technical specification:


- Rated current (40℃): 4A
- Rated voltage: 60V
- Rated impulse voltage: 800V
- Number of contacts: 3
- Pollution degree: 3
- Contact resistance: $\leq 10\text{m}\Omega$
- Insulation resistance: $\geq 100\text{M}\Omega$
- Connector locking system: screw M8*1
- Terminal: dip solder
- Degree of protection: IP67
- Mating cycles: ≥ 100
- Temperature range: $-40^{\circ}\text{C} \dots +85^{\circ}\text{C}$
- Material of housing: CuZn
- Material of insert: PA
- Material of contact: copper alloy
- Contact plating: Au

通孔安装
With bore hole

拧紧力矩(Tightening moment):1Nm

螺纹安装
With thread to screw in面板安装尺寸
Panel Cut-out针位图
Contact arrangements

3Pin



	X	Y
1	-1.75	0.00
2	-	-
3	1.75	0.00
4	0.00	1.75

4Pin



	X	Y
1	-1.70	-0.50
2	-1.08	1.45
3	1.70	-0.50
4	1.08	1.45

						表面处理 Finish	—	图号 Drawing No.	—
						材料 Material	—	产品代号 Part Code	M8-M03-BKR-M8-D
标记 Mark	处数 Number	变更描述 Description			签名 Signature	日期 Date	比例 Scale 2:1	产品料号 Part No.	1620033141011
绘图 Drawn	姓名/Name	TC CHEN	日期/Date	12.05.2016	姓名/Name	日期/Date		产品名称 Part Name	—
审核 Checked	姓名/Name	ZM LIN	日期/Date	12.05.2016	姓名/Name	日期/Date		 厦门唯恩电气有限公司 XIAMEN WAIN ELECTRICAL CO.LTD	
工艺 Process	姓名/Name	—	日期/Date	—	批准 Approved	YY LUO			
							 	All Dimensions in mm Original Size DIN A 4	