


技术参数:

- 插针数: 4
- 额定电流(40°C): 4A
- 额定电压: 30V
- 额定脉冲电压: 800V
- 污染等级: 3
- 接触电阻: $\leq 3m\Omega$
- 绝缘电阻: $> 100M\Omega$
- 锁紧方式: 螺旋式M8*1
- 电缆类型: PVC, 黑色RAL9005
- 线规: 0.25mm²
- 防护等级: IP67
- 插拔次数: > 100
- 温度范围: -25°C ... +85°C
- 外壳材料: TPU
- 插体材料: PA
- 插针材料: 铜合金
- 电镀材料: 金



Technical specification:

- Number of contacts: 4
- Rated current (40°C): 4A
- Rated voltage: 30V
- Rated impulse voltage: 800V
- Pollution degree: 3
- Contact resistance: $\leq 3m\Omega$
- Insulation resistance: $> 100M\Omega$
- Connector locking system: screw M8*1
- Cable type: PVC, Black RAL 9005
- Wire gauge: 0.25mm²
- Degree of protection: IP67
- Mating cycles: > 100
- Temperature range: -20°C ... +85°C
- Material of housing: TPU
- Material of insert: PA
- Material of contact: copper alloy
- Contact plating: Au

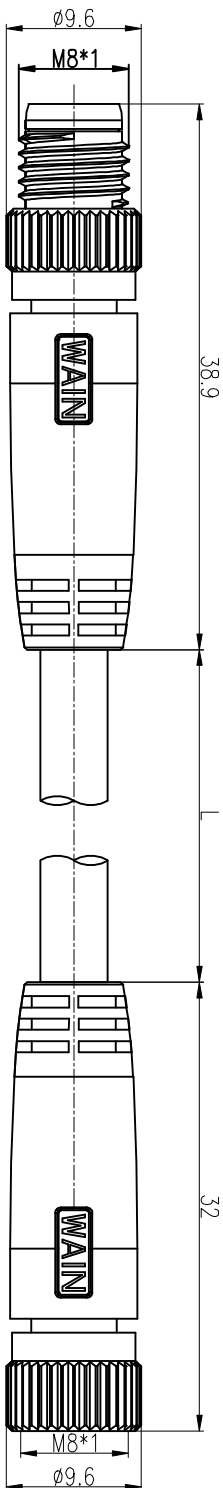

例如型号“M8-M04-T/F04-T-L-PVC”, “L”表示带线长度, 单位m。
 Ex: Part code “M8-M04-T/F04-T-L-PVC”,
 the “L” represents the cable length, unit m.

公/Male		母/Female	
3Pin	4Pin	3Pin	4Pin

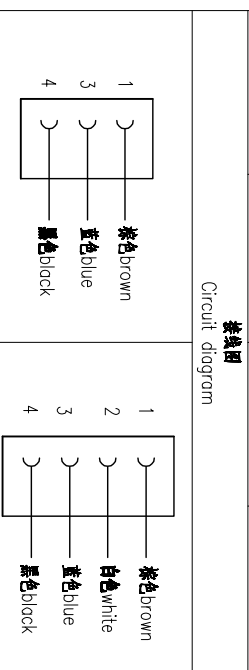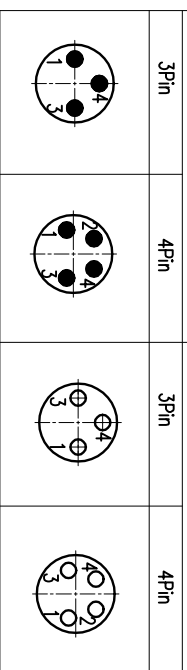

标题/Title	图号/Drawing No.	表面处理/Finish	材料/Material	比例/Scale	版本/REV	重量/Weight	数量/Qty.		
审核/Checked	HQ ZHANG	04.11.2020	批准/Approved	HQ ZHANG	04.11.2020	2:1	V1.0	55g	-
绘图/Drawn	ZQ XU	04.11.2020	标准/Stand.	-	-	-	-	-	-
工艺/Process	HQ ZHANG	04.11.2020	批准/Approved	HQ ZHANG	04.11.2020	2:1	V1.0	55g	-