




插针数 Contacts	料号 Order No.	产品代号 Part Code	电缆直径(I) Cable outlet	重量 Weight
	3	1630034013001	M12S-M03A-T-D6	4-6mm
	1630034013002	M12S-M03A-T-D8	6-8mm	23g

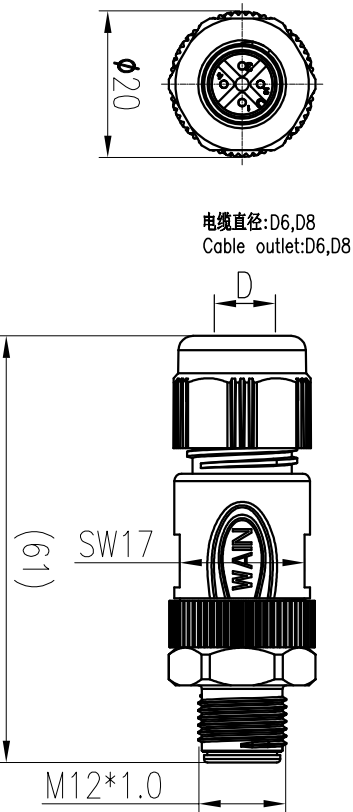

电缆直径:D6,D8
Cable outlet:D6,D8

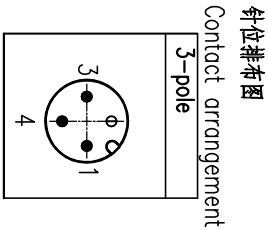

- 技术参数:
- 产品系列: M12-A 编码
 - 插针数: 3
 - 额定电流(40°C): 4A
 - 额定电压: 250V
 - 额定脉冲电压: 2500V
 - 污染等级: 3
 - 接触电阻: ≤10mΩ
 - 防护等级: IP67
 - 插拔次数: >100
 - 温度范围: -40°C...+85°C
 - 绝缘阻抗: >100MΩ
 - 接线方式: 螺钉锁紧
 - 线径范围: max.0.75mm² (max.AWG18)
 - 锁紧扭矩: 0.2Nm (螺钉接线)
 - 电缆直径: 4-6mm,6-8mm
 - 电缆剥线长度: 20mm
 - 导线剥线长度: 5mm
- 材料特性:
- 锁紧螺母: 不锈钢
 - 插针材料: 铜合金
 - 插针表面处理: 镀金
 - 外壳材料: PA
 - 颜色: RAL 9005 (黑色)
 - 绝缘材料: PA
- 符合标准: IEC 61076-2-101
- Standards: IEC 61076-2-101
- Technical specification:
- Series: M12 A-Code
 - Number of contacts: 3
 - Rated current(40°C): 4A
 - Rated voltage: 250V
 - Rated impulse voltage: 2500V
 - Pollution degree: 3
 - Contact resistance: ≤10mΩ
 - Degree of protection: IP67
 - Mating cycles: >100
 - Temperature range: -40°C - +85°C
 - Insulation resistance: >100MΩ
 - Termination method: screw connection
 - Wire gauge: max.0.75mm² (max.AWG18)
 - Torque: 0.2Nm (screw terminal blocks)
 - Cable Outlet: 4~6mm,6-8mm
 - Stripping length of the sheath: 20mm
 - Stripping length of the individual wire:5mm
- Material properties :
- Material of locking system: Stainless steel
 - Material of contact: copper alloy
 - Contact plating: Au
 - Material of housing : PA
 - Colour of housing: RAL 9005 (Black)
 - Material of insert: PA

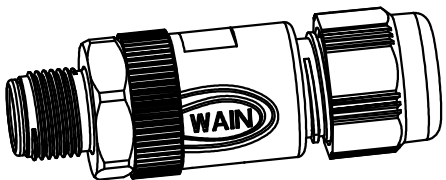

变更记录 Mark Number		变更描述/Description		签名 Signature		日期 Date		表面处理 Finish	材料 Material	比例 Scale	版本 REV.	重量 Weight	数量 Qty.	图号 Drawing No.	产品代号 Part Code	产品料号 Part No.	产品名称 Part Name
绘图 Drawn		姓名/Name	日期/Date	—		—		—	—	1:1	V1.0	—	—	—	M12S-M03A-T-DX	—	—
审核 Checked		YY LUO	26.11.2015														
工艺 Process		—	—	批准 Approved		YY LUO		26.11.2015		All Dimensions in mm Original Size DIM A 4		厦门唯恩电气有限公司 XIAMEN WAIN ELECTRICAL CO.LTD					