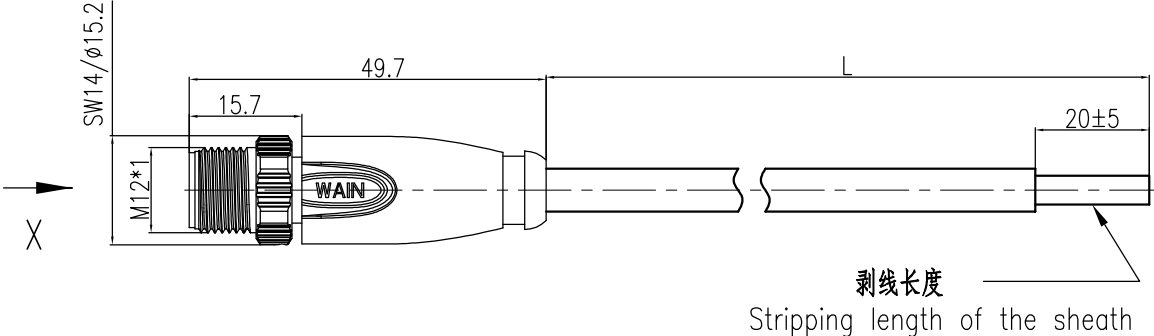




日期/Date		设计员 Filing Clerk		1		2		3		4		5		6					
技术参数： - 产品系列：M12 A-code - 插针数：3 - 额定电流(40℃)：4A - 额定电压：250V - 额定脉冲电压：2500V - 污染等级：3 - 接触电阻：≤10mΩ - 绝缘电阻：≥100MΩ - 锁紧方式：螺纹式M12*1 - 电缆类型：PVC，黑色RAL9005 - 线规：0.34mm ² (AWG22) - 防护等级：IP67 - 插拔次数：≥100 - 温度范围：-25℃ ... +85℃ - 外壳材料：TPU - 插体材料：PA - 插针材料：铜合金 - 插针电镀材料：金										插针数 Contacts		料号 Order No.		产品代号 Part Code		电缆长度(L) Cable length		重量 Weight	
										3		1630034014021		M12-M03A-T-1.5-PVC-SH		1.5m		71g	
												1630034014022		M12-M03A-T-5.0-PVC-SH		5m		198g	
												-		M12-M03A-T-L-PVC-SH		Lm		-g	
																			
Technical specification: - Series: M12 A-Code - Number of contacts: 3 - Rated current (40℃): 4A - Rated voltage: 250V - Rated impulse voltage: 2500V - Pollution degree: 3 - Contact resistance: ≤10mΩ - Insulation resistance: ≥100MΩ - Connector locking system: screw M12*1 - Cable type: PVC , Black RAL 9005 - Wire gauge: 0.34mm ² (AWG22) - Degree of protection: IP67 - Mating cycles: ≥100 - Temperature range: -25℃ ... +85℃ - Material of housing: TPU - Material of insert: PA - Material of contact: copper alloy - Contact plating: Au										针位图 Contact arrangements		接线图 Circuit diagram							
例如型号”M12-M03A-T-L-PVC-SH”， ”L”表示带线长度，单位m。 Ex: Part code ”M12-M03A-T-L-PVC-SH”， the ”L” represents the cable length, unit m.																			
								表面处理 Finish		-		图号 Drawing No.		-					
								材料 Material		-		产品代号 Part Code		M12-M03A-T-L-PVC-SH					
标记 Mark		处数 Number		变更描述/Description		签名 Signature		日期 Date				产品料号 Part No.		-					
绘图 Drawn		L CHEN		13.12.2023		标准化 Stand.		-		-		比例 Scale		1:1					
审核 Checked		ZQ XU		13.12.2023								版本 REV.		V1.1					
工艺 Process		-		-		批准 Approved		HQ ZHANG		13.12.2023		重量 Weight		-g					
												数量 Qty.		-					
												All Dimensions in mm Original Size DIN A 4							
												 厦门唯恩电气有限公司 XIAMEN WAIN ELECTRICAL CO.LTD							
1		2		3		4		5		6									