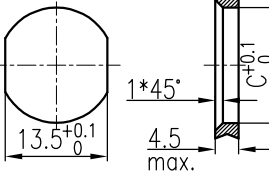

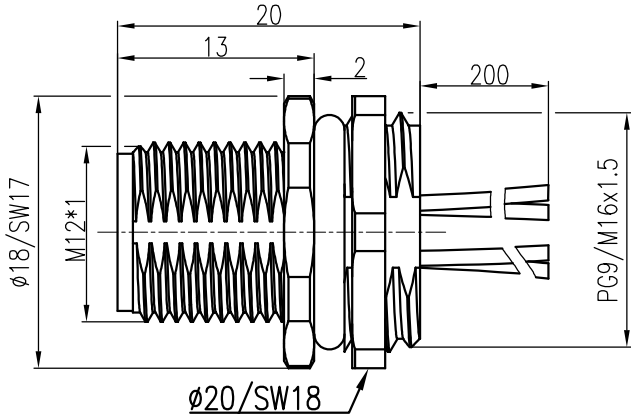





日期/Date		图样/Blank		1		2		3		4		5		6																											
技术参数: - 产品系列: M12 A-Code - 插针数: 4、5、8 - 额定电流(40℃): 4A(4\5-pole)、2A(8-pole) - 额定电压: 250V(4-pole)、125V(5-pole)、60V(8-pole) - 额定脉冲电压: 2500V(4-pole)、1500V(5-pole)、800V(8-pole) - 污染等级: 3 - 接触电阻: ≤10mΩ - 绝缘电阻: ≥100MΩ - 锁紧方式: 螺纹式M12*1 - 连接方式: 预接导线0.25mm ² (AWG24) - 防护等级: IP67 - 插拔次数: ≥100 - 温度范围: -40℃ ... +85℃ - 外壳材料: 铸锌镀镍 - 插体材料: PA - 插针材料: 铜合金 - 插针电镀材料: 金 Technical specification: - Series: M12 A-Code - Number of contacts: 4、5、8 - Rated current (40℃): 4A(4\5-pole)、2A(8-pole) - Rated voltage: 250V(4-pole)、125V(5-pole)、60V(8-pole) - Rated impulse voltage: 2500V(4-pole)、1500V(5-pole)、800V(8-pole) - Pollution degree: 3 - Contact resistance: ≤10mΩ - Insulation resistance: ≥100MΩ - Connector locking system: screw M12*1 - Terminal: single-strand wires 0.25mm ² (AWG24) - Degree of protection: IP67 - Mating cycles: ≥100 - Temperature range: -40℃ ... +85℃ - Material of housing: Zinc diecasting nickel plated - Material of insert: PA - Material of contact: copper alloy - Contact plating: Au						面板安装尺寸 Panel Cut-out		针位图 Contact arrangements		4-Pole		5-Pole		8-Pole																											
						通孔安装 With bore hole				螺纹安装 With thread to screw in																															
																																									
						比例/scale 1:1				比例/scale 1:1																															
								<table><tr><td></td><td>A</td><td>B</td><td>C</td></tr><tr><td>PG9</td><td>PG9</td><td>ø16.2</td><td>ø15.3</td></tr><tr><td>M16x1.5</td><td>M16x1.5</td><td>ø17.0</td><td>ø16.1</td></tr></table>			A	B	C	PG9	PG9	ø16.2	ø15.3	M16x1.5	M16x1.5	ø17.0	ø16.1	接线图 Circuit diagram																			
	A	B	C																																						
PG9	PG9	ø16.2	ø15.3																																						
M16x1.5	M16x1.5	ø17.0	ø16.1																																						
																																									
						<table><tr><td>插针数 Contacts</td><td>产品料号 Cable outlet</td><td>型号 Part Code</td><td>重量 Weight</td></tr><tr><td>4</td><td>1630043014001</td><td>M12-M04A-BK-PG9-W0.25</td><td>14.1 g</td></tr><tr><td></td><td>1630043014021</td><td>M12-M04A-BK-M16-W0.25</td><td>14.4 g</td></tr><tr><td>5</td><td>1630053014001</td><td>M12-M05A-BK-PG9-W0.25</td><td>14.1 g</td></tr><tr><td></td><td>1630053014021</td><td>M12-M05A-BK-M16-W0.25</td><td>14.4 g</td></tr><tr><td>8</td><td>1630083014001</td><td>M12-M08A-BK-PG9-W0.25</td><td>17.7 g</td></tr><tr><td></td><td>1630083014021</td><td>M12-M08A-BK-M16-W0.25</td><td>18.0 g</td></tr></table>						插针数 Contacts	产品料号 Cable outlet	型号 Part Code	重量 Weight	4	1630043014001	M12-M04A-BK-PG9-W0.25	14.1 g		1630043014021	M12-M04A-BK-M16-W0.25	14.4 g	5	1630053014001	M12-M05A-BK-PG9-W0.25	14.1 g		1630053014021	M12-M05A-BK-M16-W0.25	14.4 g	8	1630083014001	M12-M08A-BK-PG9-W0.25	17.7 g		1630083014021	M12-M08A-BK-M16-W0.25	18.0 g		
插针数 Contacts	产品料号 Cable outlet	型号 Part Code	重量 Weight																																						
4	1630043014001	M12-M04A-BK-PG9-W0.25	14.1 g																																						
	1630043014021	M12-M04A-BK-M16-W0.25	14.4 g																																						
5	1630053014001	M12-M05A-BK-PG9-W0.25	14.1 g																																						
	1630053014021	M12-M05A-BK-M16-W0.25	14.4 g																																						
8	1630083014001	M12-M08A-BK-PG9-W0.25	17.7 g																																						
	1630083014021	M12-M08A-BK-M16-W0.25	18.0 g																																						
						<table><tr><td>表面处理 Finish</td><td colspan="3">-</td><td>图号 Drawing No.</td><td>-</td></tr><tr><td>材料 Material</td><td colspan="3">-</td><td>产品代号 Part Code</td><td>M12-MXX-BK-XX-W0.25</td></tr><tr><td>比例 Scale</td><td>版本 REV.</td><td>重量 Weight</td><td>数量 Qty.</td><td>产品料号 Part No.</td><td>-</td></tr><tr><td>2:1</td><td>V1.0</td><td>-</td><td>-</td><td>产品名称 Part Name</td><td>-</td></tr><tr><td colspan="4"> All Dimensions in mm Original Size DIN A 4</td><td colspan="2"> 厦门唯恩电气有限公司 XIAMEN WAIN ELECTRICAL CO.LTD</td></tr></table>						表面处理 Finish	-			图号 Drawing No.	-	材料 Material	-			产品代号 Part Code	M12-MXX-BK-XX-W0.25	比例 Scale	版本 REV.	重量 Weight	数量 Qty.	产品料号 Part No.	-	2:1	V1.0	-	-	产品名称 Part Name	-	 All Dimensions in mm Original Size DIN A 4				 厦门唯恩电气有限公司 XIAMEN WAIN ELECTRICAL CO.LTD	
表面处理 Finish	-			图号 Drawing No.	-																																				
材料 Material	-			产品代号 Part Code	M12-MXX-BK-XX-W0.25																																				
比例 Scale	版本 REV.	重量 Weight	数量 Qty.	产品料号 Part No.	-																																				
2:1	V1.0	-	-	产品名称 Part Name	-																																				
 All Dimensions in mm Original Size DIN A 4				 厦门唯恩电气有限公司 XIAMEN WAIN ELECTRICAL CO.LTD																																					