
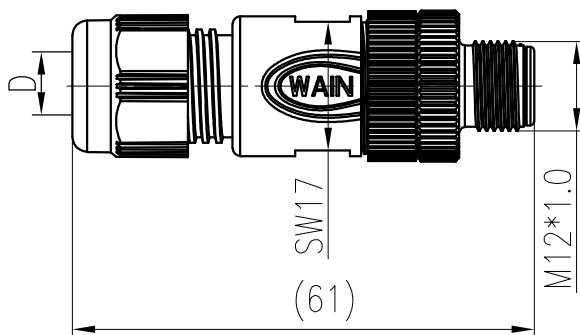


日期/Date

档案员
Filing Clerk

插针数 Contacts	料号 Order No.	产品代号 Part Code	电缆直径(D) Cable outlet	重量 Weight
3	1630034014506	M12-M03B-T-D6	4-6mm	23.8g
	1630034014507	M12-M03B-T-D8	6-8mm	23.6g
4	1630044111001	M12-M04B-T-D6	4-6mm	24.6g
	1630044111002	M12-M04B-T-D8	6-8mm	24.4g
5	1630054111001	M12-M05B-T-D6	4-6mm	26.4g
	1631054113002	M12-M05B-T-D8	6-8mm	26.2g

电缆直径:D6,D8
Cable outlet:D6,D8

技术参数:

- 产品系列: M12-B 编码

- | | | | |
|------------|-------------------------------------|-------|-------|
| 插针数: | 3 | 4 | 5 |
| 额定电流(40℃): | 4A | 4A | 4A |
| 额定电压: | 250V | 250V | 125V |
| 额定脉冲电压: | 2500V | 2500V | 1500V |
| 污染等级: | 3 | | |
| 接触电阻: | ≤10mΩ | | |
| 防护等级: | IP67 | | |
| 插拔次数: | >100 | | |
| 温度范围: | -40℃~+85℃ | | |
| 绝缘阻抗: | ≥100MΩ | | |
| 接线方式: | 螺钉锁紧 | | |
| 线径范围: | max.0.75mm ² (max.AWG18) | | |
| 锁紧扭矩: | 0.2Nm (螺钉接线) | | |
| 电缆直径: | 4-6mm,6-8mm | | |
| 电缆剥线长度: | 20mm | | |
| 导线剥线长度: | 5mm | | |

材料特性:

- 锁紧螺帽: 金属
- 插针材料: 铜合金
- 插针表面处理: 镀金
- 外壳材料: PA
- 颜色: RAL 9005 (黑色)
- 绝缘材料: PA

Technical specification:

- Series: M12 B-Code
- Number of contacts: 3 4 5
- Rated current(40℃): 4A 4A 4A
- Rated voltage: 250V 250V 125V
- Rated impulse voltage: 2500V 2500V 1500V
- Pollution degree: 3
- Contact resistance: ≤10mΩ
- Degree of protection: IP67
- Mating cycles: >100
- Temperature range: -40℃ - +85℃
- Insulation resistance: ≥100MΩ
- Termination method: screw connection
- Wire gauge: max.0.75mm² (max.AWG18)
- Torque: 0.2Nm (screw terminal blocks)
- Cable Outlet: 4~6mm,6-8mm
- Stripping length of the sheath: 20mm
- Stripping length of the individual wire:5mm

Material properties:

- Material of locking system: Metal
- Material of contact: copper alloy
- Contact plating: Au
- Material of housing: PA
- Colour of housing: RAL 9005 (Black)
- Material of Insert: PA


符合标准: IEC 61076-2-101

Standards: IEC 61076-2-101

针位排布图

Contact arrangement

5-pole	4-pole	3-pole

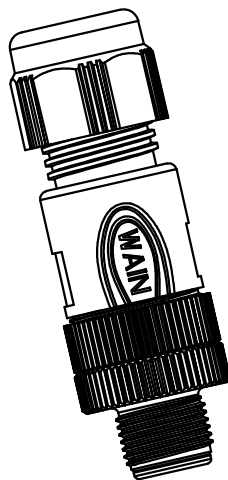

						表面处理 Finish	—	图号 Drawing No.	—
						材料 Material	—	产品代号 Part Code	M12-M0xB-T-Dx
标记 Mark	处数 Number	变更描述/Description			签名 Signature	日期 Date		产品料号 Part No.	—
绘图 Drawn	姓名/Name ZH SU	日期/Date 18.12.2020	标准化 Stand.		姓名/Name —	日期/Date —	比例 Scale 1:1	版本 REV. V1.0	重量 Weight —
审核 Checked	姓名/Name ZQ XU	日期/Date 18.12.2020			姓名/Name —	日期/Date —	数量 Qty. —		
工艺 Process	—	—	批准 Approved	HQ ZHANG	18.12.2020				
							比例 Scale 1:1	版本 REV. V1.0	重量 Weight —
							数量 Qty. —		
							All Dimensions in mm Original Size DIN A 4		
							厦门唯恩电气有限公司 XIAMEN WAIN ELECTRICAL CO.LTD		