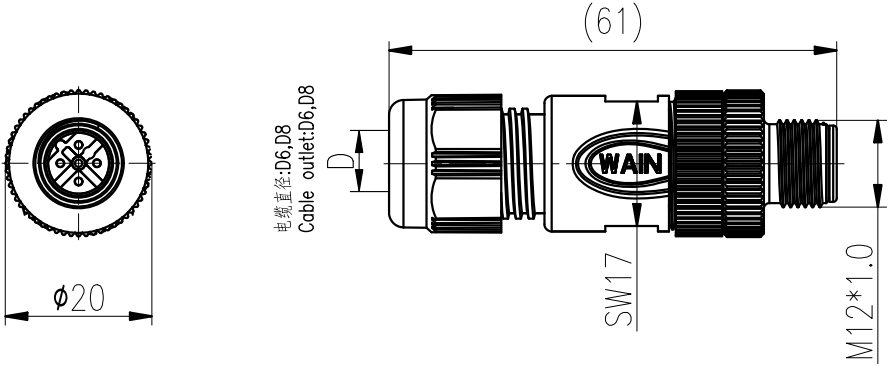





日期/Date		档案员 Filing Clerk		1		2		3		4		5		6																	
												插针数 Contacts		料号 Order No.		产品代号 Part Code		电缆直径(D) Cable outlet		重量 Weight											
 电缆直径:D6,D8 Cable outlet:D6,D8												3		1630034014506		M12-M03B-T-D6		4-6mm		23.8g											
														1630034014507		M12-M03B-T-D8		6-8mm		23.6g											
												4		1630044111001		M12-M04B-T-D6		4-6mm		24.6g											
														1630044111002		M12-M04B-T-D8		6-8mm		24.4g											
												5		1630054111001		M12-M05B-T-D6		4-6mm		26.4g											
														1631054113002		M12-M05B-T-D8		6-8mm		26.2g											
												技术参数: 产品系列: M12-B 编码 插针数: 3 4 5 额定电流(40℃): 4A 4A 4A 额定电压: 250V 250V 125V 额定脉冲电压: 2500V 2500V 1500V 污染等级: 3 接触电阻: <10mΩ 防护等级: IP67 插拔次数: >100 温度范围: -40℃...+85℃ 绝缘阻抗: ≥100MΩ 接线方式: 螺钉锁紧 线径范围: max.0.75mm² (max.AWG18) 锁紧扭矩: 0.2Nm (螺钉接线) 电缆直径: 4-6mm,6-8mm 电缆剥线长度: 20mm 导线剥线长度: 5mm Technical specification: Series: M12 B-Code Number of contacts: 3 4 5 Rated current(40℃): 4A 4A 4A Rated voltage: 250V 250V 125V Rated impulse voltage: 2500V 2500V 1500V Pollution degree: 3 Contact resistance: <10mΩ Degree of protection: IP67 Mating cycles: >100 Temperature range: -40℃ - +85℃ Insulation resistance: ≥100MΩ Termination method: screw connection Wire gauge: max.0.75mm² (max.AWG18) Torque: 0.2Nm (screw terminal blocks) Cable Outlet: 4-6mm,6-8mm Stripping length of the sheath: 20mm Stripping length of the individual wire:5mm 材料特性: 锁紧螺帽: 金属 插针材料: 铜合金 插针表面处理: 镀金 外壳材料: PA 颜色: RAL 9005 (黑色) 绝缘材料: PA Material properties : Material of locking system: Metal Material of contact: copper alloy Contact plating: Au Material of housing : PA Colour of housing: RAL 9005 (Black) Material of Insert: PA Standards: IEC 61076-2-101																			
												5-pole		4-pole		3-pole															
																															
												标记 Mark		处数 Number		变更描述/Description		签名 Signature		日期 Date											
												姓名/Name		日期/Date		姓名/Name		日期/Date		比例 Scale		版本 REV.		重量 Weight		数量 Qty.					
												绘图 Drawn		YL CHEN		01.12.2023		标准化 Stand.		—		—		1:1		V1.1		—		—	
												审核 Checked		ZQ XU		01.12.2023															
												工艺 Process		—		—		批准 Approved		HQ ZHANG		01.12.2023						All Dimensions in mm Original Size DIN A 4		 厦门唯恩电气有限公司 XIAMEN WAIN ELECTRICAL CO.,LTD	