


技术参数:

- 产品系列: M12 A-Code
- 插针数: 8
- 额定电流(40℃): 2A
- 额定电压: 60V
- 额定脉冲电压: 800V
- 污染等级: 3
- 接触电阻: $\leq 10\text{m}\Omega$
- 绝缘电阻: $\geq 100\text{M}\Omega$
- 锁紧方式: 螺纹式M12*1
- 电缆类型: PUR, 黑色RAL9005
- 线规: 0.25mm^2 (AWG24)
- 防护等级: IP67
- 插拔次数: ≥ 100
- 温度范围: $-25^\circ\text{C} \dots +85^\circ\text{C}$
- 外壳材料: TPU
- 插体材料: PA
- 插针材料: 铜合金
- 插针电镀材料: 金

Technical specification:

- Series: M12 A-Code
- Number of contacts: 8
- Rated current (40℃): 2A
- Rated voltage: 60V
- Rated impulse voltage: 800V
- Pollution degree: 3
- Contact resistance: $\leq 10\text{m}\Omega$
- Insulation resistance: $\geq 100\text{M}\Omega$
- Connector locking system: screw M12*1
- Cable type: PUR , Black RAL 9005
- Wire gauge: 0.25mm^2 (AWG24)
- Degree of protection: IP67
- Mating cycles: ≥ 100
- Temperature range: $-25^\circ\text{C} \dots +85^\circ\text{C}$
- Material of housing: TPU
- Material of insert: PA
- Material of contact: copper alloy
- Contact plating: Au

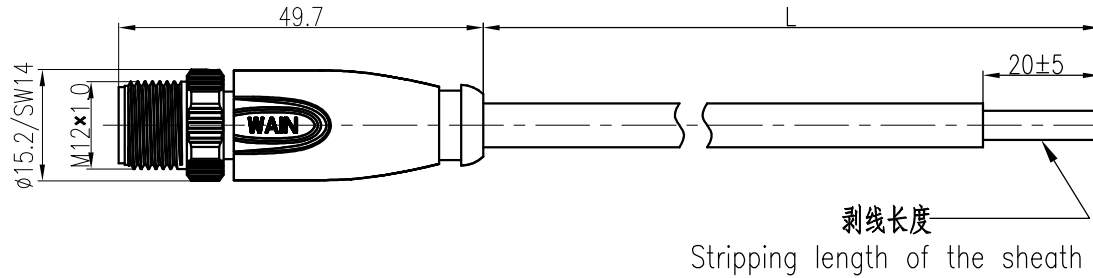

例如型号"M12-M08A-T-L-PUR", "L"表示带线长度, 单位m.

Ex: Part code "M12-M08A-T-L-PUR",
the "L" represents the cable length, unit m.

1630084014042	M12-M08A-T-5.0-PUR	5.0m	168g
1630084014041	M12-M08A-T-1.5-PUR	1.5m	55g
-	M12-M08A-T-L-PUR	Lm	-g
产品料号 Part NO.	产品代号 Part Code	线缆长度(L)	重量Weight

						表面处理 Finish		—		图号 Drawing No.	—
						材料 Material		—		产品代号 Part Code	M12-M08A-T-L-PUR
标记 Mark	处数 Number	变更描述/Description			签名 Signature	日期 Date				产品料号 Part No.	—
	姓名/Name	日期/Date		姓名/Name	日期/Date	比例 Scale	版本 REV.	重量 Weight	数量 Qty.	产品名称 Part Name	—
绘图 Drawn	TC CHEN	20.08.2016	标准化 Stand.	—	—	1:1	V1.1	—g	—		
审核 Checked	ZM LIN	20.08.2016									
工艺 Process	—	—	批准 Approved	YY LUO	20.08.2016	 		All Dimensions in mm Original Size DIN A 4		 厦门唯恩电气有限公司 XIAMEN WAIN ELECTRICAL CO.LTD	