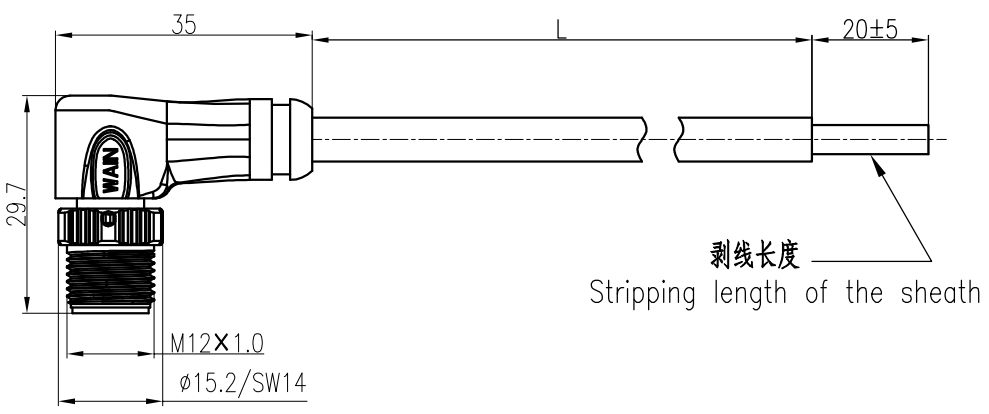


日期/Date		Filing Clerk		1		2		3		4		5		6	
技术参数: - 产品系列: M12 A-Code - 插针数: 8 - 额定电流(40℃): 2A - 额定电压: 60V - 额定脉冲电压: 800V - 污染等级: 3 - 接触电阻: ≤10mΩ - 绝缘电阻: >100MΩ - 锁紧方式: 螺纹式M12*1 - 电缆类型: PUR, 黑色RAL9005 - 线规: 0.25mm ² (AWG24) - 防护等级: IP67 - 插拔次数: >100 - 温度范围: -25℃ ... +85℃ - 外壳材料: TPU - 插体材料: PA - 插针材料: 铜合金 - 插针电镀材料: 金															
Technical specification: - Series: M12 A-Code - Number of contacts: 8 - Rated current (40℃): 2A - Rated voltage: 60V - Rated impulse voltage: 800V - Pollution degree: 3 - Contact resistance: ≤10mΩ - Insulation resistance: >100MΩ - Connector locking system: screw M12*1 - Cable type: PUR , Black RAL 9005 - Wire gauge: 0.25mm ² (AWG24) - Degree of protection: IP67 - Mating cycles: >100 - Temperature range: -25℃ ... +85℃ - Material of housing: TPU - Material of insert: PA - Material of contact: copper alloy - Contact plating: Au												例如型号”M12-M08A-S-L-PUR”, ”L”表示带线长度, 单位m. Ex: Part code ”M12-M08A-S-L-PUR”, the ”L” represents the cable length, unit m.			
1630085014042		M12-M08A-S-5.0-PUR		5.0m		168g									
1630085014041		M12-M08A-S-1.5-PUR		1.5m		85.4g									
-		M12-M08A-S-L-PUR		Lm		-g									
产品料号 Part NO.		产品代号 Part Code		线缆长度(L)		重量Weight									
标记 Mark		处数 Number		变更描述/Description		签名 Signature		日期 Date		表面处理 Finish		图号 Drawing No.		-	
绘图 Drawn		TC CHEN		20.08.2016		标准化 Stand.		-		-		产品代号 Part Code		M12-M08A-S-L-PUR	
审核 Checked		ZM LIN		20.08.2016		-		-		材料 Material		产品料号 Part No.		-	
工艺 Process		-		-		批准 Approved		YY LUO		20.08.2016		比例 Scale		-	
												版本 REV.		-	
												重量 Weight		-	
												数量 Qty.		-	
												All Dimensions in mm Original Size DIN A 4			
												厦门唯恩电气有限公司 XIAMEN WAIN ELECTRICAL CO.LTD			