

插针数 Contacts	电缆出口直径 Cable outlet	产品料号 Cable outlet	型号 Part Code	重量 Weight
9(3+PE+5)	4.2-6.6 mm	1810000992508	M23-MC04/5-CCT/R28-D6.6-SH	99.2g
	7.5-12 mm	1660007992500	M23-MC04/5-CCT/R28-D12-SH	97.7g
	9.5-14.5 mm	1660007992501	M23-MC04/5-CCT/R28-D14.5-SH	96.8g
	14-17 mm	1660007992502	M23-MC04/5-CCT/R28-D17-SH	94.3g

技术参数:

- 产品系列: M23

— 插针数: 9(3+PE+5)

— 插针分布: 3+PE 5

— 插针直径(mm): $\phi 2$ $\phi 1$

— 接线范围(mm²/M+5B22FAWG): 0.35-4.0/22-12 0.14-1.5/26-16

— 接线方式: 冷压连接

— 额定电流(25℃): 30A 9A

— 额定电压: 630V 250V

— 额定脉冲电压: 6KV 4KV

— 过电压保护等级: III

— 污染等级: 3

— 插针需单独订购。

机械参数:

- 外壳材质: 铜合金, 锌合金

— 外壳表面处理: 镀镍

— 插芯材质: 聚酰胺

— 密封材质: 氟橡胶

— 温度范围: -40℃...+130℃

— 电缆直径: 4.2-17mm 屏蔽

— 插拔次数: >500

— 防护等级: IP67

Technical specification:

- Series: M23

— Number of contacts: 9(3+PE+5)

— Contact arrangement: 3+PE 5

— Contact diameter(mm): $\phi 2$ $\phi 1$

— Wire gauge(mm²/AWG): 0.35-4.0/22-12 0.14-1.5/26-16

— Terminal:Crimp

— Rated current(25℃): 30A 9A

— Rated voltage: 630V 250V

— Rated impulse voltage: 6KV 4KV

— Overvoltage category: III

— Pollution degree: 3

Mechanical specification:

- Material of housing: CuZn,Zinc(GD-Zn)

— Finish of housing:Nickel-plated

— Material of Insert:Polyamide

— Material of sealing:FPM



— Temperature range: -40℃...+130℃

— Cable Outlet: 4.2-17mm Shielded

— Mating cycles: >500

— Degree of protection: IP67

— Contact need to be ordered separately.

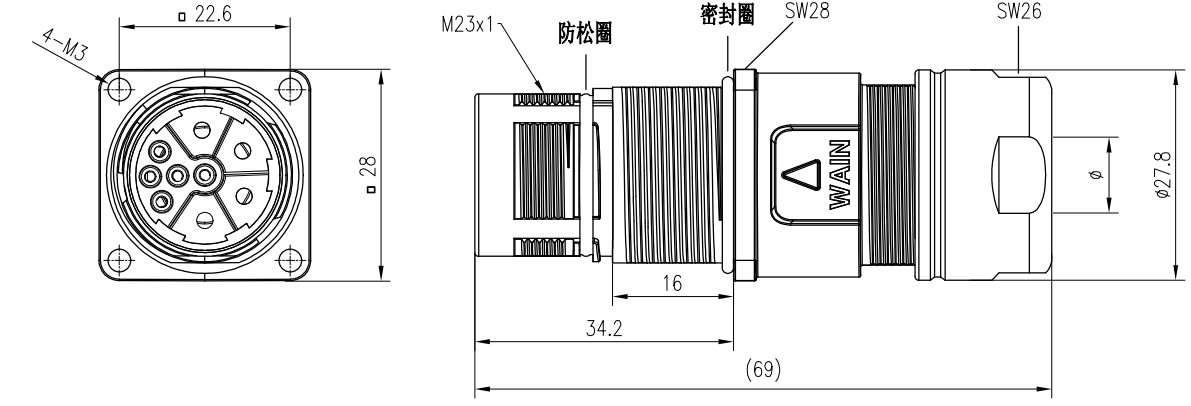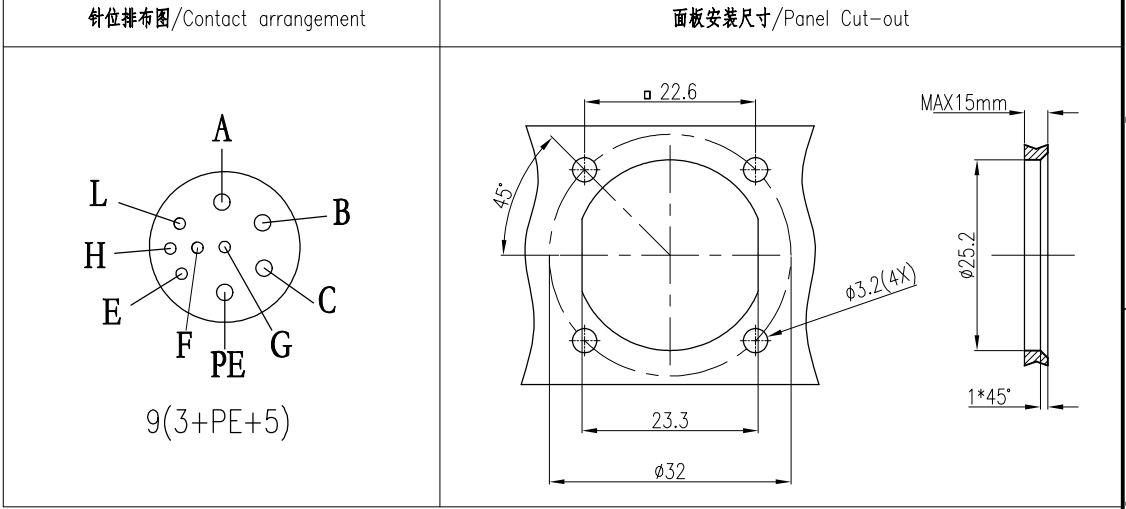

						表面处理 Finish	—	图号 Drawing No.	—
						材料 Material	—	产品代号 Part Code	M23-MC04/05-CCT/R28-Dxx-SH
标记 Mark	处数 Number	变更描述/Description			签名 Signature	日期 Date		产品料号 Part No.	—
绘图 Drawn	姓名/Name	日期/Date	标准化 Stand.		姓名/Name	日期/Date	比例 Scale	版本 REV.	重量 Weight
审核 Checked	姓名/Name	日期/Date					1:1	V1.0	数量 Qty.
工艺 Process			批准 Approved	HQ ZHANG	01.08.2021				
							比例 Scale	版本 REV.	重量 Weight
							数量 Qty.	—	—
							All Dimensions in mm Original Size DIN A 4		
							厦门唯恩电气有限公司 XIAMEN WAIN ELECTRICAL CO.LTD		