

日期/Date

档案员
Filing Clerk

1

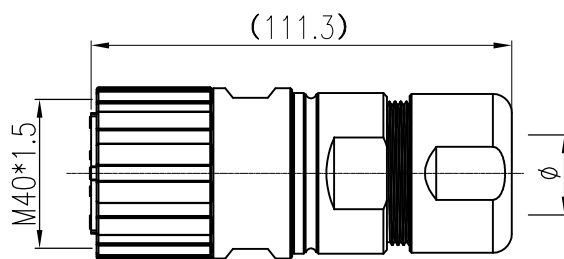

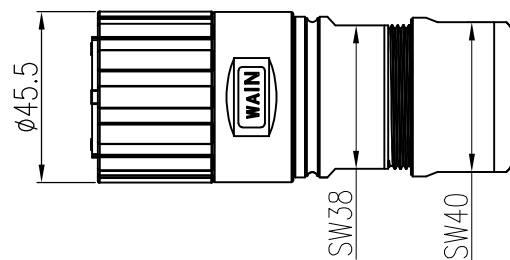
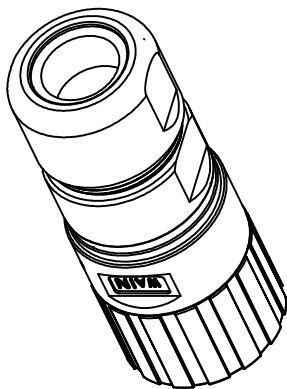
2

3

4

5

6

电缆出口直径: 19-21.5mm
Cable outlet: 19-21.5mm

技术参数:

- 插针数: 4/4 4(电力) + 4(信号)
- 额定电流: 63A 20A
- 额定电压: 630V 250V
- 耐电压: 6000V 4000V
- 污染等级: 3
- 接触电阻: $\leq 1\text{m}\Omega$ (Power)
 $\leq 3\text{m}\Omega$ (Signal)
- 插拔次数: ≥ 500
- 锁定方式: 螺纹锁定 M40*1.5
- 电缆出口直径: 19-21.5mm
- 温度范围: -40°C - $+130^\circ\text{C}$
- 防护等级: IP67
- 外壳材料: 锌合金
- 绝缘材料: PA
- 接线方式: 冷压连接

须单独订购冷压针: 4 * $\varnothing 2\text{mm}$, 4 * $\varnothing 3.6\text{mm}$

Technical specification:

- Number of contacts: 4/4 4(power) + 4(signal)
- Rated current: 63A 20A
- Rated voltage: 630V 250V
- Rated impulse voltage: 6000V 4000V
- Pollution degree: 3
- Contact resistance: $\leq 1\text{m}\Omega$ (Power)
 $\leq 3\text{m}\Omega$ (Signal)
- Mating cycles: ≥ 500
- Connector locking system: screw M40x1.5
- Cable Outlet: 19-21.5mm
- Temperature range: -40°C - $+130^\circ\text{C}$
- Degree of protection: IP67
- Material of housing: Zinc
- Material of insert: PA

Order crimp contacts 4 x $\varnothing 2\text{mm}$, 4 x $\varnothing 3.6\text{mm}$ separately

						表面处理 Finish	—			图号 Drawing No.	—
						材料 Material	—			产品代号 Part Code	M40-FC04/4-T-D21.5-SI
标记 Mark	处数 Number	变更描述/Description			签名 Signature	日期 Date				产品料号 Part No.	1700084202001
	姓名/Name	日期/Date			姓名/Name	日期/Date	比例 Scale	版本 REV.	重量 Weight	数量 Qty.	产品名称 Part Name
绘图 Drawn	ZM LIN	07.04.2016	标准化 Stand.		—	—					—
审核 Checked	YY LUO	07.04.2016					1:2	V1.1	315g	—	
工艺 Process	—	—	批准 Approved	YY LUO	07.04.2016	 	All Dimensions in mm Original Size DIN A 4			 厦门唯恩电气有限公司 XIAMEN WAIN ELECTRICAL CO.LTD	