

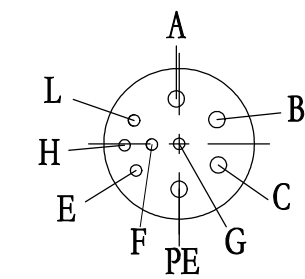


插针数 Contacts	电缆出口直径 Cable outlet	产品料号 Cable outlet	型号 Part Code	重量 Weight
9(3+PE+5)	4.2-6.6 mm	1810000992502	M23-MC04/5-TH-D6.6-SH	106.8g
	7.5-12 mm	1660001102500	M23-MC04/5-TH-D12-SH	105.3g
	9.5-14.5 mm	1810000992503	M23-MC04/5-TH-D14.5-SH	104.5g
	14-17 mm	1810000992504	M23-MC04/5-TH-D17-SH	102g



针位排布图
Contact arrangement

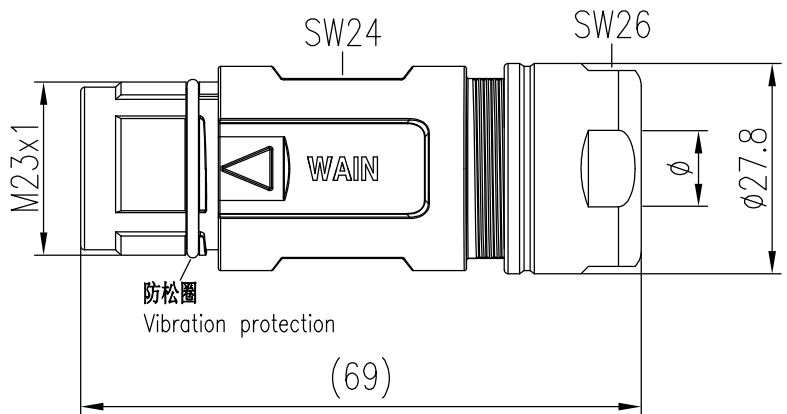


技术参数:
- 产品系列: M23
- 插针数: 9(3+PE+5)
- 插针分布: 3+PE 5
- 插针直径(mm): φ2 φ1
- 接线范围(mm\M+5B22FAWG): 0.35-4.0/22-12 0.14-1.5/26-16
- 接线方式: 冷压连接
- 额定电流(25℃): 30A 9A
- 额定电压: 630V 250V
- 额定脉冲电压: 6KV 4KV
- 过电压保护等级: III
- 污染等级: 3
- 插针需单独订购。

机械参数:
- 外壳材质: 铜合金, 锌合金
- 外壳表面处理: 镀镍
- 插芯材质: 聚酰胺
- 密封材质: 氟橡胶
- 温度范围: -40℃...+130℃
- 电缆直径: 4.2-17mm 屏蔽
- 插拔次数: >500
- 防护等级: IP67

Technical specification:
- Series: M23
- Number of contacts: 9(3+PE+5)
- Contact arrangement: 3+PE 5
- Contact diameter(mm): φ2 φ1
- Wire gauge(mm² /AWG): 0.35-4.0/22-12 0.14-1.5/26-16
- Terminal:Crimp
- Rated current(25℃): 30A 9A
- Rated voltage: 630V 250V
- Rated impulse voltage: 6KV 4KV
- Overvoltage category: III
- Pollution degree: 3

Mechanical specification:
- Material of housing: CuZn,Zinc(GD-Zn)
- Finish of housing:Nickel-plated
- Material of Insert:Polyamide
- Material of sealing:FPM
- Temperature range: -40℃...+130℃
- Cable Outlet: 4.2-17mm Shielded
- Mating cycles: >500
- Degree of protection: IP67
- Contact need to be ordered separately.

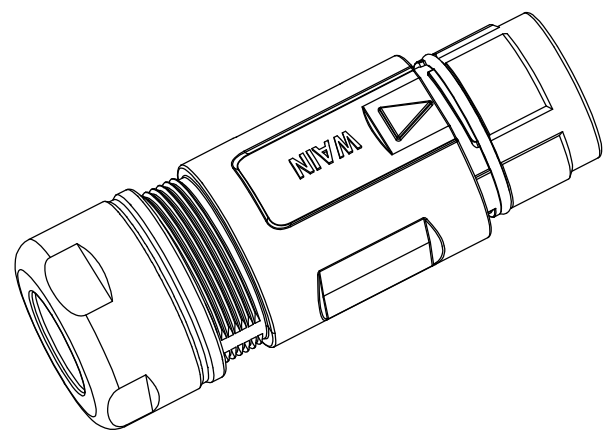

						表面处理 Finish	-				图号 Drawing No.	-
						材料 Material	-				产品代号 Part Code	M23-MC04/5-TH-DXX-SH
标记 Mark	处数 Number	变更描述/Description			签名 Signature	日期 Date					产品料号 Part No.	-
		姓名/Name	日期/Date		姓名/Name	日期/Date	比例 Scale	版本 REV.	重量 Weight	数量 Qty.	产品名称 Part Name	-
绘图 Drawn	GY YE	28.04.2023	标准化 Stand.		-	-	1:1	V1.0	-	-		
审核 Checked	ZQ XU	28.04.2023										
工艺 Process	-	-	批准 Approved	HQ ZHANG	28.04.2023			All Dimensions in mm Original Size DIN A 4		 厦门唯恩电气有限公司 XIAMEN WAIN ELECTRICAL CO.LTD		