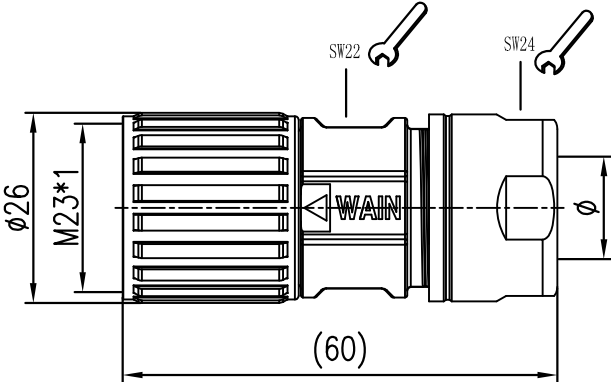

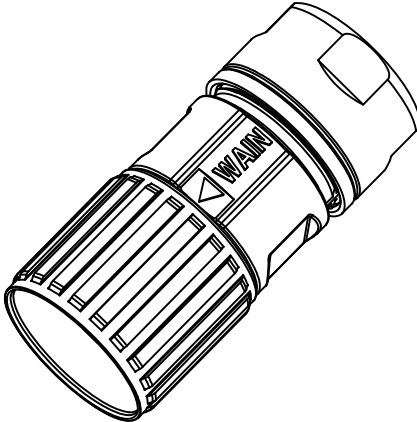
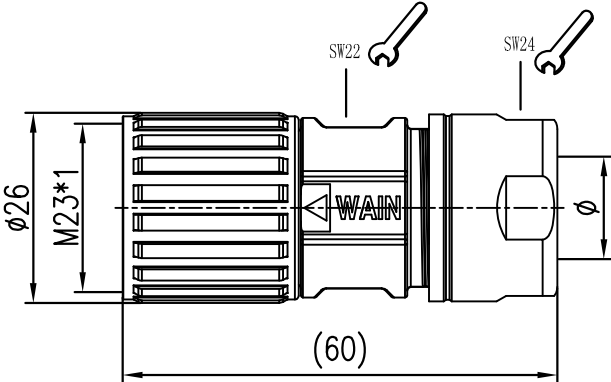

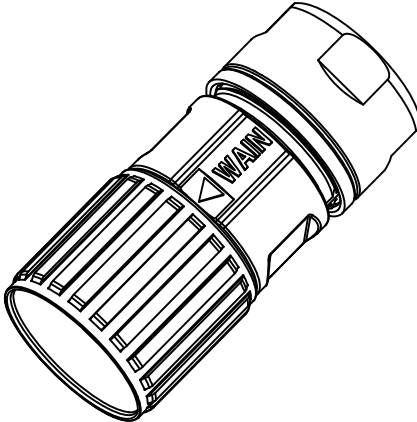


日期/Date		制图员 Drawing Clerk		1		2		3		4		5		6	
技术参数:						插针数 Contacts		电缆出口直径 Cable outlet		产品料号 Cable outlet		型号 Part Code		重量 Weight	
- 产品系列: MR23 - 插针数: 12 - 插针直径(mm) : $\varnothing 1$ - 接线范围(mm²/AWG): 0.03-1.0/AWG32-16 - 接线方式: 冷压连接 - 额定电流(25℃): 7A - 额定电压: 160V - 额定脉冲电压: 2.5KV - 过电压保护等级: III - 污染等级: 3 - 插针需单独订购。						12		4.5-8 mm		1810124213004		MR23-012R-T-D8-SH		88g	
								6-10 mm		1810124213005		MR23-012R-T-D10-SH		88g	
								9-14.5 mm		1810124213006		MR23-012R-T-D14.5-SH		87g	
机械参数:						针位排布图 Contact arrangement									
- 外壳材质: 铜合金, 锌合金 - 外壳表面处理: 镀镍 - 插芯材质: PBT - 密封材质: 氟橡胶 - 温度范围: -40℃...+130℃ - 电缆直径: 4.5-14.5mm 屏蔽 - 插拔次数: >500 - 防护等级: IP67															
															
															
Technical specification:						比例 Scale: 2:1									
- Series: MR23 - Number of contacts: 12 - Contact diameter(mm): $\varnothing 1$ - Wire gauge(mm²/AWG): 0.03-1.0/AWG32-16 - Terminal: Crimp - Rated current(25℃): 7A - Rated voltage: 160V - Rated impulse voltage: 2.5KV - Overvoltage category: III - Pollution degree: 3															
															
															
Mechanical specification:						图号 Drawing No.									
- Material of housing: CuZn,Zinc(GD-Zn) - Finish of housing:Nickel-plated - Material of Insert:PBT - Material of sealing:FPM - Temperature range: -40℃...+130℃ - Cable Outlet: 4.5-14.5mm Shielded - Mating cycles: >500 - Degree of protection: IP67 - Contact need to be ordered separately.						产品代号 Part Code									
						产品料号 Part No.									
						产品名称 Part Name									
Mark						处数 Number		变更描述/Description		签名 Signature		日期 Date		表面处理 Finish	
绘图 Drawn						TC CHEN		30.10.2019		姓名/Name		日期/Date		材料 Material	
审核 Checked						QZ XU		30.10.2019		姓名/Name		日期/Date		比例 Scale	
工艺 Process						—		—		姓名/Name		日期/Date		版本 REV.	
										批准 Approved		30.10.2019		重量 Weight	
										HQ ZHANG		30.10.2019		数量 Qty.	
														All Dimensions in mm Original Size DIN A 4	
														厦门唯恩电气有限公司 XIAMEN WAIN ELECTRICAL CO.LTD	