

技术参数:

- 插针数: 17
- 额定电流
- 信号针: 7A
- 额定电压: 25V~/60V-
- 额定脉冲电压: 1.5KV
- 污染等级: 3
- 绝缘电阻: $\geq 10^{12}\Omega$
- 温度范围: $-40^{\circ}\text{C} \dots +130^{\circ}\text{C}$
- 阻燃等级: V0 (UL94)
- 接触电阻: $\leq 5\text{m}\Omega$
- 插拔次数: ≥ 100
- 插体材料: PBT
- 插针材料: 铜合金
- 电镀材料: 金
- PCB插焊连接
- 信号针: $\phi 0.6\text{mm}$



仅适用不封底下壳: HR23-BK-D2.7, HR23-BK/R-OD2.7
HR23-BK/R-OM2.5

Technical specification:


- Number of contacts: 17
- Rated current
- signal contact: 7A
- Rated voltage: 25V~/60V-
- Rated impulse voltage: 1.5KV
- Pollution degree: 3
- Insulation resistance: $\geq 10^{12}\Omega$
- Temperature range: $-40^{\circ}\text{C} \dots +130^{\circ}\text{C}$
- Flammability acc.to UL94: V0 (UL94)
- Contact resistance: $\leq 5\text{m}\Omega$
- Mating cycles: ≥ 100
- Material of insert: PBT
- Material of contact: copper alloy
- Contact plating: Au
- PCB solder termination
- signal contact: $\phi 0.6\text{mm}$

Suitable only for bulkhead mounted housings: HR23-BK-D2.7,
HR23-BK/R-OD2.7, HR23-BK/R-OM2.5


插针插接长度
reference to bulkhead
mounted housing

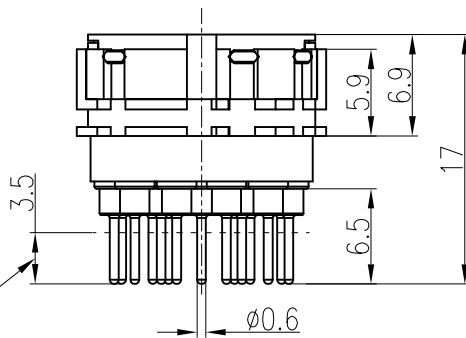


反向编码
Reverse coding

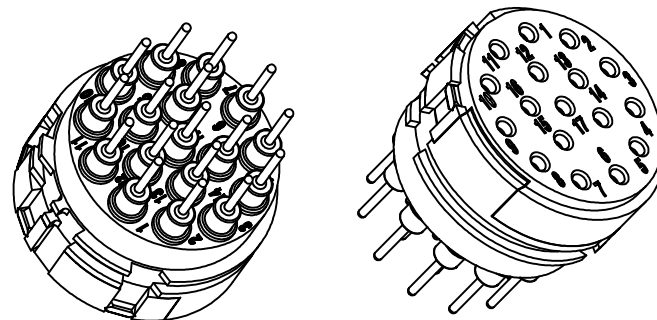

PCB孔细节
PCB layout

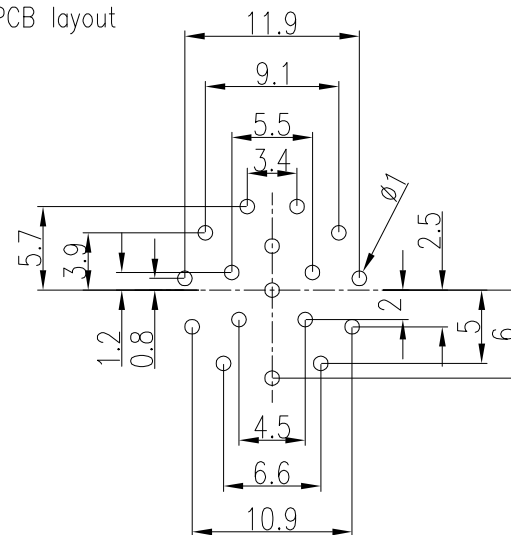

						表面处理 Finish		—		图号 Drawing No.	—
						材料 Material		—		产品代号 Part Code	HR23-017R-FTHT
标记 Mark	处数 Number	变更描述/Description			签名 Signature	日期 Date				产品料号 Part No.	1810170240101
	姓名/Name	日期/Date		姓名/Name	日期/Date	比例 Scale	版本 REV.	重量 Weight	数量 Qty.	产品名称 Part Name	—
绘图 Drawn	TC CHEN	04.05.2016	标准化 Stand.	—	—	2:1	V1.1	5.8g	—		
审核 Checked	ZM LIN	04.05.2016									
工艺 Process	—	—	批准 Approved	YY LUO	04.05.2016			All Dimensions in mm Original Size DIN A 4		 厦门唯恩电气有限公司 XIAMEN WAIN ELECTRICAL CO.LTD	