

安装开孔图  
 Panel cut out

技术参数:

- 材料:

- 对接架: 不锈钢
- 固定螺栓: 铁, 镀锌

- 插入容差:

- x轴: ±1.5mm
- y轴: ±1.5mm

- 插拔次数: ≥500

产品包括: 1个架子, 4个带平头的螺栓, 用于固定对接架

Technical specification:

- Material:

- Docking frame: stainless steel
- Fixing screws: steel, zinc-plated

- Pull-in-range:


- x-axis: ±1.5mm
- y-axis: ±1.5mm

- Mechanical working life: ≥500

Range of delivery: 1 frame, 4 cheese head shoulder screws to fix the docking frame

1) 距离 电气针和光线电缆针距离最大27mm, 气动针距离最大26.5mm

1) Distance for electrical and F.O. contacts max. 27mm, for pneumatic contacts max. 26.5mm

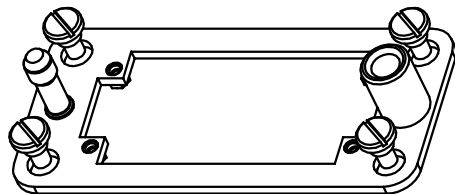

						表面处理 Finish		-		图号 Drawing No.		-	
						材料 Material		-		产品代号 Part Code		H16B-ADK	
标记 Mark		处数 Number		变更描述/Description		签名 Signature		日期 Date		产品料号 Part No.		198002004003	
		姓名/Name		日期/Date		姓名/Name		日期/Date		比例 Scale		版本 REV.	
绘图 Drawn		HZ LAN		18.10.2016		标准化 Stand.		-		重量 Weight		94g	
审核 Checked		ZW WU		18.10.2016						数量 Qty.		-	
工艺 Process		-		-		批准 Approved		YY LUO		18.10.2016		All Dimensions in mm Original Size DIN A 4	
										厦门唯恩电气有限公司 XIAMEN WAIN ELECTRICAL CO.LTD			