
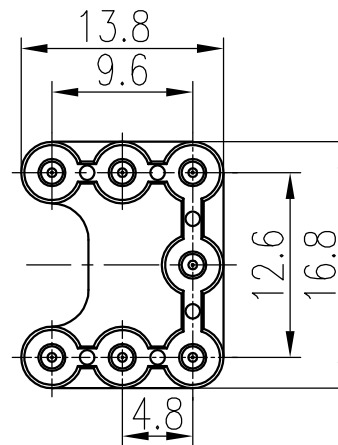


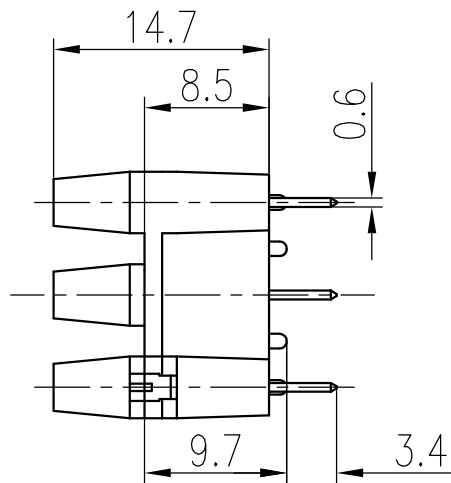

技术参数:

插芯:

- 额定电流: 7.5A
- 额定电压: 250V
- 额定脉冲电压: 4kV
- 污染等级: 3
- 绝缘阻抗: $\geq 10^{10}\Omega$
- 材料: 聚碳酸酯
- 颜色: RAL 7032 (浅灰色)
- 温度范围: $-40^{\circ}\text{C} - +125^{\circ}\text{C}$
- 依据UL 94的阻燃等级: V0
- 可插拔次数: ≥ 500

插针:

- 接线方式: 焊接连接
- 材料: 铜合金
- 表面处理: 镀金

用于最大2.4mm的印刷电路板


Technical specification:

Insters:

- Rated current: 7.5A
- Rated voltage: 250V
- Rated impulse voltage: 4kV
- Pollution degree: 3
- Insulation resistance: $\geq 10^{10}\Omega$
- Material: polycarbonate
- Colour: RAL 7032(light grey)
- Temperature range: $-40^{\circ}\text{C} - +125^{\circ}\text{C}$
- Flammability acc.to UL 94: V0
- Mating cycles: ≥ 500

Contacts:

- Terminal: solder terminal
 - Material: copper alloy
 - Surface: hard-gold plated
- For PCBs up to 2.4mm

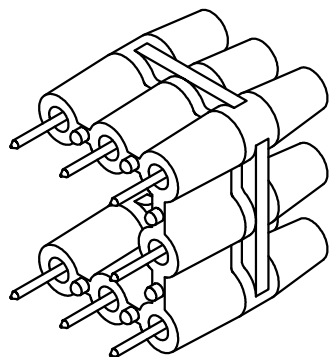

						表面处理 Finish	—			图号 Drawing No.	—
						材料 Material	—			产品代号 Part Code	APT-Q7
标记 Mark	处数 Number	变更描述/Description			签名 Signature	日期 Date	比例 Scale	版本 REV.	重量 Weight	数量 Qty.	产品料号 Part No.
绘图 Drawn	BQ LUO	18.10.2010	标准化 Stand.	—	—	—	1:2	V1.0	2.5g	—	1980020070010
审核 Checked	P RAO	18.10.2010									产品名称 Part Name
工艺 Process	—	—	批准 Approved	YY LIN	18.10.2010						—
							All Dimensions in mm Original Size DIN A 4			XIAMEN WAIN ELECTRICAL CO.,LTD	