

技术参数:

- 产品系列: MR23
- 插针数: 6/7
- 插针直径(mm) : $\phi 2$
- 接线范围(mm²/AWG): 0.35-2.5/AWG22-14
- 接线方式: 冷压连接
- 额定电流(25℃): 20A
- 额定电压: 110V
- 额定脉冲电压: 2.5KV
- 过电压保护等级: III
- 污染等级: 3
- 插针需单独订购。

机械参数:




- 外壳材质: 铜合金, 锌合金
- 外壳表面处理: 镀镍
- 插芯材质: PBT
- 密封材质: 氟橡胶
- 温度范围: -40℃...+130℃
- 电缆直径: 4.5-14.5mm 屏蔽
- 插拔次数: >500
- 防护等级: IP67

Technical specification:

- Series: MR23
- Number of contacts: 6/7
- Contact diameter(mm): $\phi 2$
- Wire gauge(mm²/AWG): 0.35-2.5/AWG22-14
- Terminal: Crimp
- Rated current(25℃): 20A
- Rated voltage: 110V
- Rated impulse voltage: 2.5KV
- Overvoltage category: III
- Pollution degree: 3

Mechanical specification:

- Material of housing: CuZn,Zinc(GD-Zn)
- Finish of housing:Nickel-plated
- Material of Insert:PBT
- Material of sealing:FPM
- Temperature range: -40℃...+130℃
- Cable Outlet: 4.5-14.5mm Shielded
- Mating cycles: >500
- Degree of protection: IP67
- Contact need to be ordered separately.

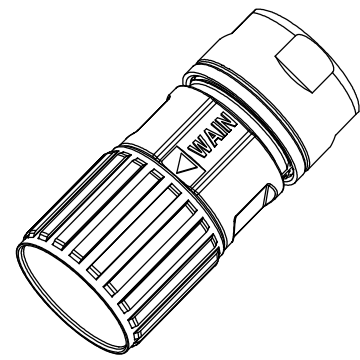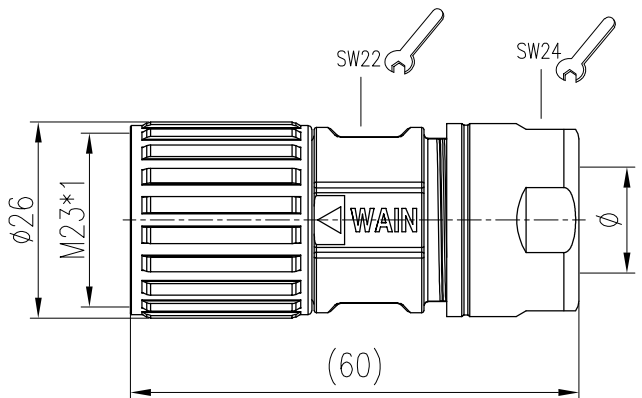

插针数 Contacts	电缆出口直径 ϕ Cable outlet	产品料号 Cable outlet	型号 Part Code	重量 Weight
6	4.5-8 mm	1810064002004	MR23-006R-T-D8-SH	88g
	6-10 mm	1810064002005	MR23-006R-T-D10-SH	88g
	9-14.5 mm	1810064002006	MR23-006R-T-D14.5-SH	87g
7	4.5-8 mm	1810074002004	MR23-007R-T-D8-SH	88g
	6-10 mm	1810074002005	MR23-007R-T-D10-SH	88g
	9-14.5 mm	1810074002006	MR23-007R-T-D14.5-SH	87g

针位排布图
Contact arrangement

比例
Scale: 2:1

比例
Scale: 2:1

						表面处理 Finish		—		图号 Drawing No.	—
						材料 Material		—		产品代号 Part Code	MR23—006R/007R—T—DXX—SH
标记 Mark	处数 Number	变更描述/Description			签名 Signature	日期 Date				产品料号 Part No.	—
姓名/Name		日期/Date		姓名/Name		日期/Date		比例 Scale	版本 REV.	重量 Weight	数量 Qty.
绘图 Drawn	GY YE	18.03.2022		—		—		1:1	V1.1	—	—
审核 Checked	QZ XU	18.03.2022									
工艺 Process	—	—		批准 Approved		HQ ZHANG		18.03.2022			