


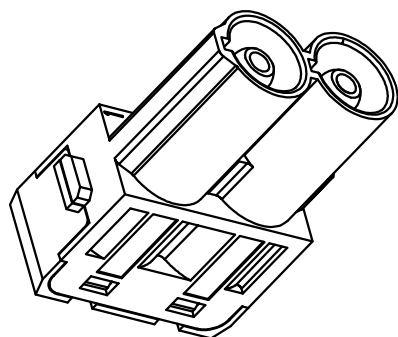

- Terminal: axial screw terminal
- Material: copper alloy
- Surface: hard-silver plated
- Contact resistance: $\leq 0.5\text{m}\Omega$
- Wire gauge: 6-16mm²
- Hexagonal driver: SW-2.5*100
- Stripping length:
 - mm²: 6 10 16 22
 - mm: 11⁺1 11⁺1 11⁺1 12.5⁺1
- Tightening torque:
 - mm²: 6 10 16 22
 - N•m: 2 3 4 5

						表面处理 Finish		—		图号 Drawing No.	—
						材料 Material		—		产品代号 Part Code	HMK70-002.1-M
标记 Mark	处数	变更描述/Description			签名 Signature	日期 Date				产品料号 Part No.	1290020110201
	姓名/Name	日期/Date		姓名/Name	日期/Date	比例 Scale	版本 REV.	重量 Weight	数量 Qty.	产品名称 Part Name	—
绘图 Drawn	BQ LUO	18.10.2010	标准化 Stand.	—	—	4:3	V1.0	31g	—		
审核 Checked	P RAO	18.10.2010									
工艺 Process	—	—	批准 Approved	YY LIN	18.10.2010	 		All Dimensions in mm Original Size DIN A 4		 厦门唯恩电气有限公司 XIAMEN WAIN ELECTRICAL CO.LTD	